



cosmotec

*your cooling solutions*



# Industrial Refrigeration



# Index

|   |           |
|---|-----------|
| <b>Our Values .....</b>                                 | <b>6</b>  |
| <b>Making cooling greener, one step at a time .....</b> | <b>7</b>  |
| <b>Service .....</b>                                    | <b>8</b>  |
| <b>Selection &amp; Monitoring Softwares .....</b>       | <b>9</b>  |
| <b>4plant .....</b>                                     | <b>10</b> |
| <b>Industrial Chiller .....</b>                         | <b>12</b> |
| <b>WLA Compact.....</b>                                 | <b>14</b> |
| WLA02-03-05.....  | 15        |
| WLA08-10-13.....  | 15        |
| <b>WRA ErP .....</b>                                    | <b>16</b> |
| WRA13-18-20-25.....                                     | 17        |
| WRA30-35-50.....  | 17        |
| WRA55-65-80-90.....                                     | 18        |
| WRA0A-5A.....   | 19        |
| <b>WLA Precision R410A.....</b>                         | <b>20</b> |
| WLA5A-8A-0B-4B-7B-0C-5C-0D-5D.....                      | 21        |
| <b>WLA Precision R32.....</b>                           | <b>22</b> |
| WLA-8A-0B-4B-7B-0C-5C-0D-5D.....                        | 23        |
| Options.....  | 24        |
| Accessories.....  | 24        |
| <b>WPA e WPA Mini - Techno Range .....</b>              | <b>26</b> |
| WPAmi Standard.....                                     | 27        |
| WPAmi Low Noise.....                                    | 27        |
| WPAmi Free Cooling.....                                 | 27        |
| WPAmi Low Noise Free Cooling.....                       | 27        |
| WPA Standard.....                                       | 28        |
| WPA Free Cooling.....                                   | 29        |
| WPA Low Noise.....                                      | 29        |
| <b>WSA &amp; WSI ErP - Techno Range .....</b>           | <b>30</b> |
| WSA - R513A.....  | 32        |
| WSF - FREE COOLING - R513A.....                         | 33        |
| WSA - R1234ze.....                                      | 34        |
| WSF - FREE COOLING - R1234ze.....                       | 35        |
| WSI - R1234ze.....                                      | 36        |
| WSJ - FREE COOLING - R1234ze.....                       | 37        |
| <b>WSW ErP - Techno Range .....</b>                     | <b>38</b> |
| WSW Standard.....                                       | 39        |
| WSW Low Noise.....                                      | 40        |
| <b>ORA.....</b>   | <b>42</b> |
| ORA20-34-43-58-70.....                                  | 43        |
| ORA95-A3-A6.....  | 43        |
| <b>Correction factors .....</b>                         | <b>44</b> |
| <b>Protection Degree .....</b>                          | <b>44</b> |



*your cooling solutions*

The history of **cosmotec** began in 1989, in Peschiera del Garda, from the dream of people who strongly believed in their experience in industrial air conditioning and in sharing it with their customers.

Shortly after the production of the first units and the beginning of export worldwide, the need to expand the product range to meet all the Thermal Management needs opened up; this led to the birth of the industrial refrigeration line, a major challenge that saw **cosmotec** competing on an equal footing with important players in the industry, asserting what is its most distinctive trait: working closely with customers, providing products and solutions that can solve their needs.

The approach chosen to meet market demands is lean and effective, a typical example of Italian flexibility, coupled with the solidity represented by the German STULZ group, which **cosmotec** joined in 2001. With STULZ, the product lines expanded to include telecommunications and new ranges of chillers with increasingly higher capacities.

The speed of product renewal grew dramatically, and to keep up with the needs of the markets, **cosmotec** decided to invest in employee training, production quality and efficiency, product engineering, and, in addition, expanded its production area, with new lines and a state-of-the art Climatic Chamber.

The company's efforts are currently aimed at maintaining the efficiency and flexibility of its product ranges at the highest levels: the "Innovation Center" was created with this goal, in order to allow the development and testing of new technologies that meet the needs of sustainability and efficiency required by today's market.



*All the achievements **cosmotec** has made so far and those to come have been possible thanks to the commitment, ideas and work of the people who make it up and who help make it grow every day*

Paolo Perotti – CEO and **cosmotec** founder



Foundation Year

**1989**




Employees

**300**



Worldwide partners

**130**



Units per year

**10.000**

# Our Values

The key to **cosmotec's** success lies in its continuous **innovation**, ability and **flexibility** in handling each project, from its conception developed in cooperation with the customer, through to installation, maintenance and service, each time studying specific solutions to the needs of each individual plant and application.

Enthusiasm, the drive to strive for excellence and for new solutions in step with customer demands, attention to **workers' health and safety** and to the **environment**, transparency and acting responsibly: these are the values by which **cosmotec** is inspired by and by which it is guided every day.

Through offering highly specialized services and products in high-tech fields, we contribute to the growth of the company team and our clients.



## Sustainability and Environmental Responsibility

We strive to reduce the company's environmental footprint and handle product design, development and production in a way that minimises environmental impact throughout its life cycle.



## People and Work Ethics

We are committed to empowering people, identifying and developing talents and creating an environment based on trust, respect and personal well-being. We base all our internal and external relationships on transparency and fairness. We work daily to ensure that all employees work under the safest conditions.



## Reliability

We conceive, design, develop and propose our solutions and services in such a way as to ensure continuity of service over time.



## Innovation

We are committed to introducing new ways of designing, producing and selling goods or services, pursuing the continuous improvement of our offer.



## Focus on Customer and Quality

We offer scalable solutions and share our expertise by gathering, intercepting and anticipating customers' implicit or expressed needs and market trends.

**The Value of People**

The company's most valuable resource is undoubtedly its people. They are the strength for the continuous development of activities and the achievement of success.

A highly specialised team, capable of proposing and implementing solutions with the highest technological level for the industrial sector, and able to fulfil the specific requirements of each individual customer, following them through every stage of the project and beyond.



# Making cooling greener, one step at a time



**cosmotec** strongly believes in the duty to contribute to decreasing and improve the environmental impacts associated with its activities and products.

## In the Company

One of **cosmotec's** main goals is the continuous improvement of environmental performance, to be achieved both through a reduction in wastage of resources (such as raw materials and energy) and through greater control of environmental costs, related to the treatment (disposal/recovery) of waste. With that in mind, the company has achieved the following certifications:



**ISO 14001** (Environmental Management System): ensuring a business model based on sustainability and reducing the environmental impact of products and the entire production process in order to provide customers with a service that meets current environmental standards. All activities that may affect the environment are assessed and controlled in accordance with current regulations.



**ISO 50001** (Energy Management System): It aims to improve the company's energy performance, such as reducing energy consumption and related costs; reducing CO2 emissions.

Furthermore, the focus on environmental issues led to the decision to adopt a policy of reducing the use of paper documentation.

## Paperless Documentation

our units are accompanied by the instructions for safe use and CE declaration, while the rest of the documentation will be available on Adam, our free App, downloadable on our website.



## In the Products

To fight climate change and reduce greenhouse gas emissions, specific regulations have been introduced, including Regulation No. 573/2024, which imposes the phase-down of HFCs.

**cosmotec** has decided to use low GWP (Global Warming Potential) gases, which significantly reduce the carbon footprint and environmental impact of our products.

Improved performance and reduced power consumption for high energy efficiency.

**EER** (Energy Efficiency Ratio): our units boast the best values in the business

**SEPR** (Seasonal Energy Performance Ratio): chillers in the **cosmotec** line comply with the Ecodesign regulation and achieve high SEPR values

# Service

The knowledge we have acquired developing industrial air conditioning and refrigeration systems, allows us to offer our customers a complete service, from the design of the systems to the supply of the machines, from the Start Up phase to the ordinary and extraordinary maintenance.

The level of complexity and precision required in today's production processes require a high level of control and reliability. The management of temperatures and heat disposal is one of the critical issues to be addressed, considering the uniqueness of each process and application.

Our technical assistance is also able to guarantee a remote assistance service: **cosmotec**, always attentive to the needs of its customers, has developed and launched on the market a range of technologically advanced controllers that guarantee connectivity wherever you are. And thanks to connectivity, our support team can be at your side in real time, wherever you are, and give you advice and suggestions on how to improve performance, solve any problems and check the operation of your units.

Please visit our dedicated website, [www.cosmotecservice.com](http://www.cosmotecservice.com), to discover our offer and find the contacts of our international service network!



## Advice and Planning

Support from the planning phase through to installation and start-up of the system



## Positioning and Installation

We guarantee the correct operation of equipment and related systems



## Startup

We guarantee perfect commissioning and start-up of the entire system, with customised solutions



## Maintenance contracts

A preventive and routine maintenance plan, ensuring constant plant efficiency



## Availability

With guaranteed response times



## Training

Programme of high-quality training courses with technical content



## Remote Assistance

At your side in real time, with the help of augmented reality devices



## Spare Parts

Supply of spare parts and repair service both in-house and on site



# Selection & Monitoring Softwares

The correct cooling of industrial plants is vital for the operation of companies, as is the ability to monitor, even remotely, that all processes are running smoothly.

In order to be at your side at all times, from planning (Web Select) to monitoring (Adam), we have developed two software packages, which we make available to you free of charge.



## Who's Adam?

This is the new app that records your **cosmotec** units and imports them onto your mobile devices. Thanks to Adam you will have access to our entire sales and technical documentation.

It's also possible to organise, monitor and report faults for for all **cosmotec** units equipped with a SEC.blue electronic controller or integrated Ethernet port.

## Why using Adam?

So you always have all the information at your fingertips, reducing the time needed for commissioning, maintenance, analysis and troubleshooting.

## Downloading Adam

- via smartphone or tablet iOS e Android (Google Play Services requires for geolocalization & OCR): download at <https://app.stulz.it>
- With a PC running Windows (in the versions currently supported by Microsoft on x86-64 architecture) download at <https://app.stulz.it/Adam.msi>



## Helping you choose

Designing a refrigeration system for industrial applications requires specific skills, which we have decided to make more accessible thanks to XShark, an **easy-to-use refrigeration system design software**. The specific characteristics of each project determine particular refrigeration needs and requirements: by entering the relevant data of your application, the XShark design software will process and present you with the most suitable proposals. We are of course available for specific advice or support in using this free tool!

XShark includes the following **cosmotec** ranges:

- WLA Compact
- WRA ErP
- WLA Precision ERP
- WPA Techno
- WPAmini Techno
- WSA/WSI Techno
- WSW Techno



## How to use XShark

First you have to download the programme on <https://cosmotec.it/software/xshark/>. Then just follow the instructions, in case you need it, there is a guide with all the information.

# 4plant

The smart cooling solution!

**4.plant** is able to optimise your systems and, thanks to constant monitoring, guarantees continuity of service and improved performance, while reducing energy consumption and ecological impact

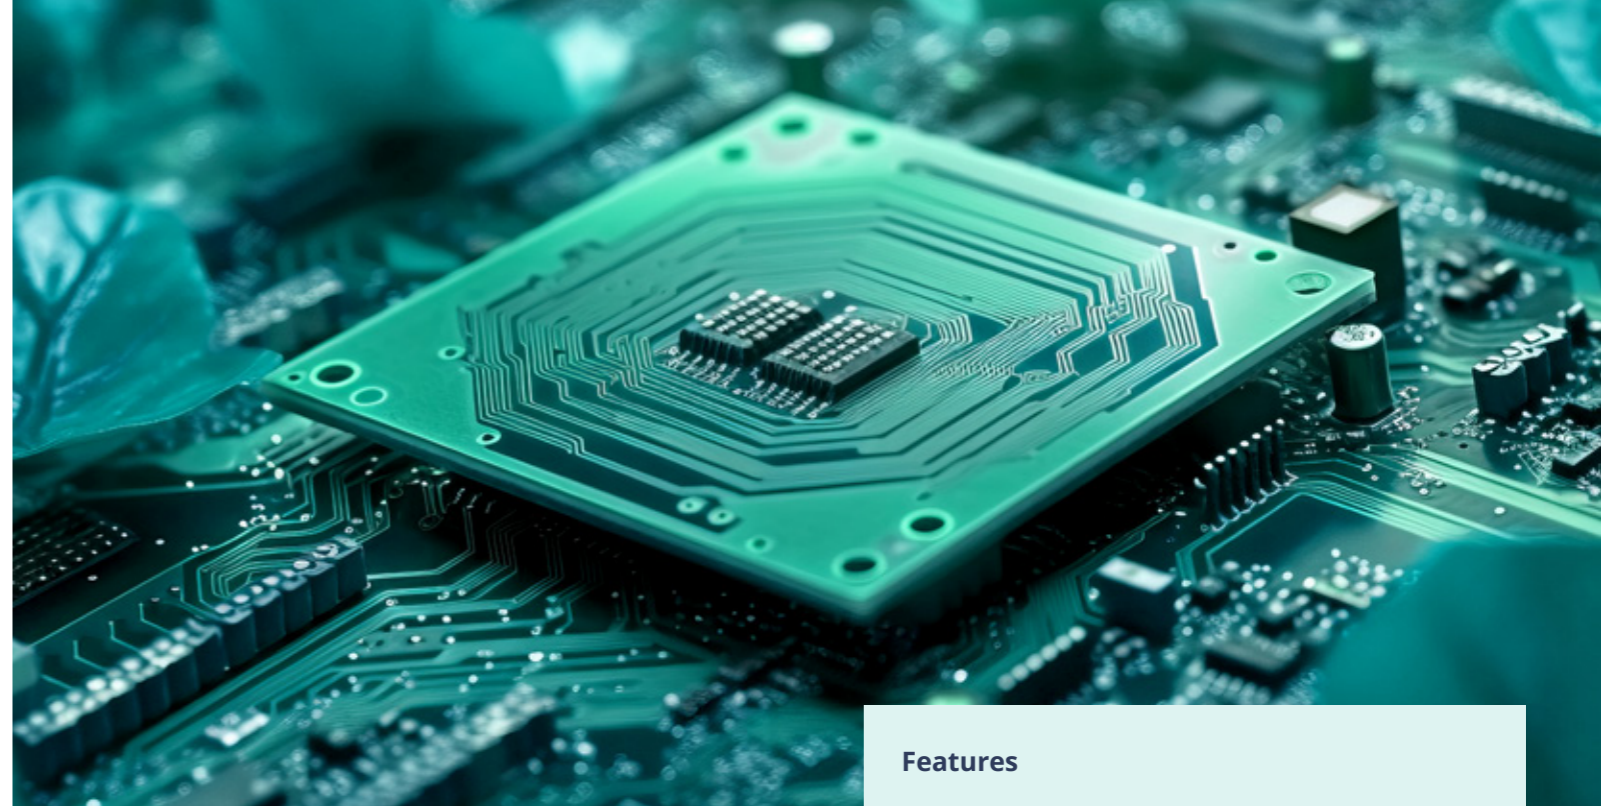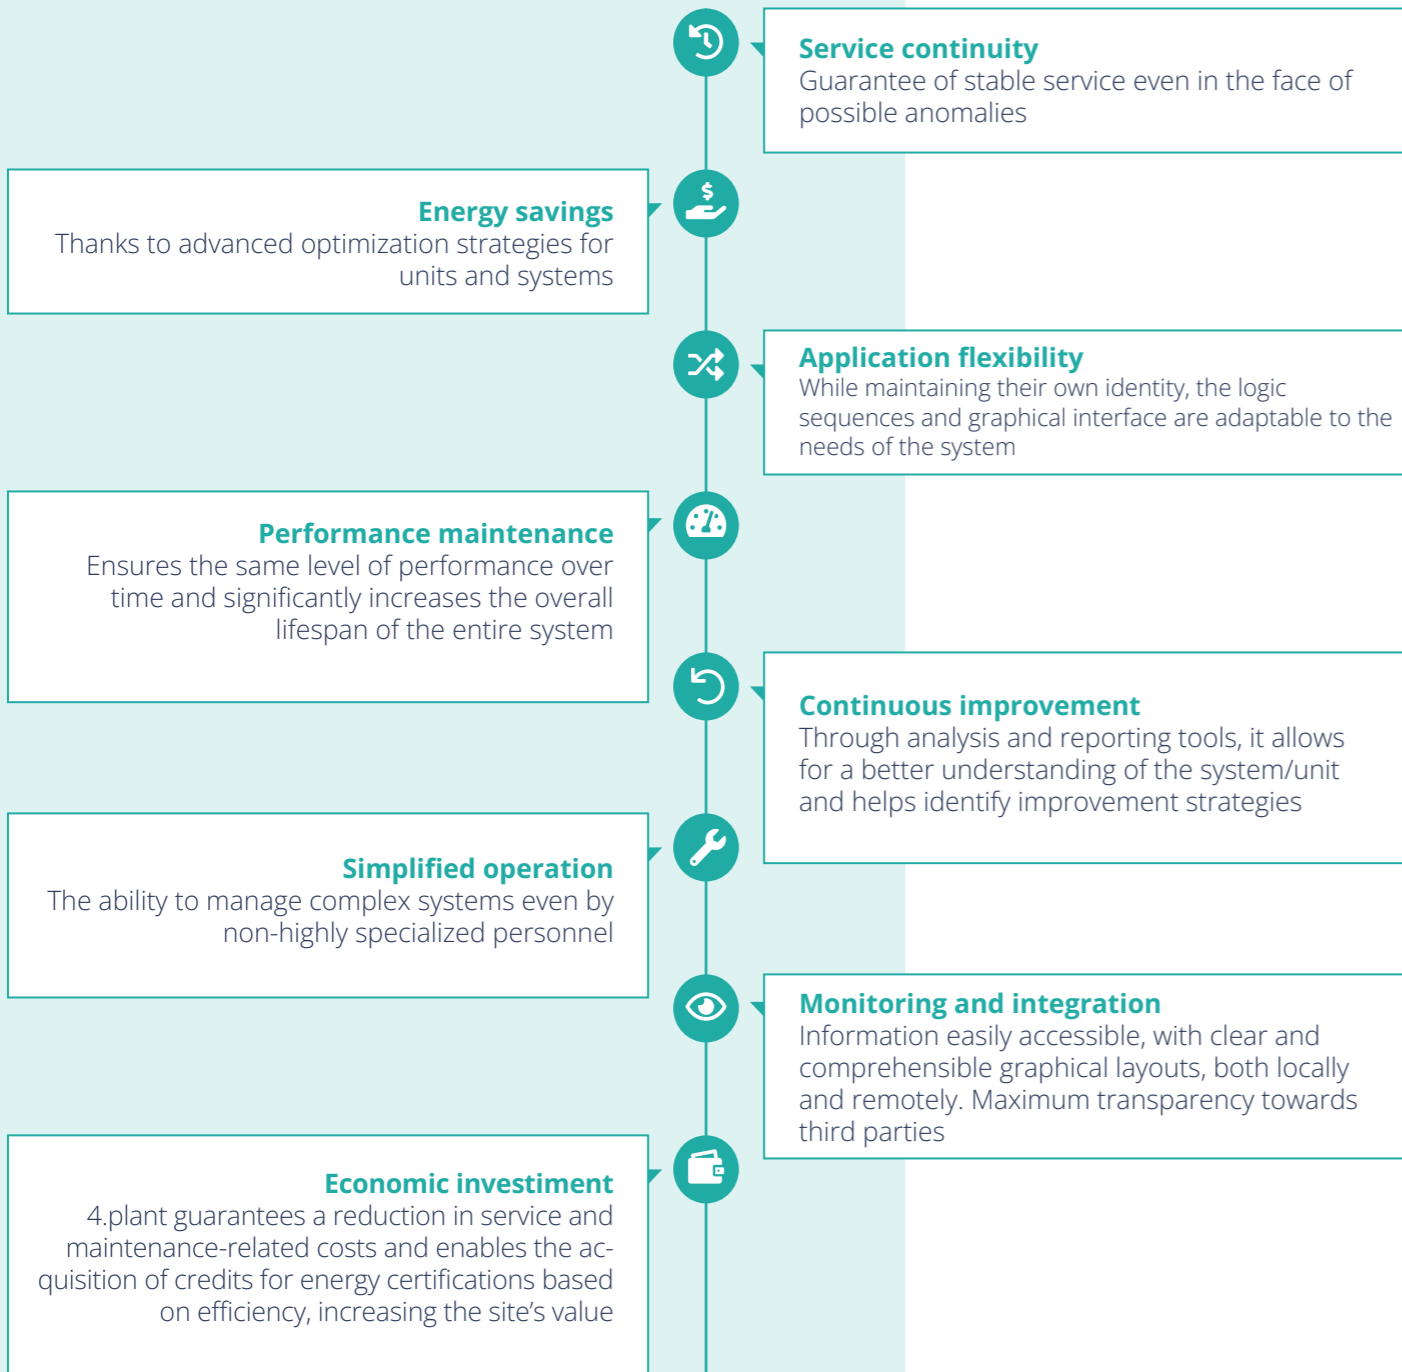

**4.plant** represents the most advanced evolution of monitoring, control, and optimization systems for industrial hydronic installations

In industrial and process applications, reliability has always been a cornerstone in ensuring service continuity. Today, another fundamental driver is efficiency, essential for meeting stringent energy standards.

This product is the result of combined hardware and software components, all bound by the same reliability, allowing installations to operate at their best, enhancing performance and uptime.

The system ensures the management and control of each individual component directly involved in the production and distribution of refrigeration energy. This includes refrigeration units, pumping groups, and any energy utilization systems, thereby creating synergy among the various parts of the installation to achieve a more efficient cooling process.


## Features

- Real-time data reading and collection
- Monitoring and supervision of units and field components
- Comparison of operating performance against project data
- Reactive optimized control for each installed component
- Dynamic management based on measurements.
- Generation of specific energy reports
- Availability of preconfigured and customizable graphs with historical trends of variables
- Access to the graphical interface via web on PCs and mobile devices
- Local and remote connection while adhering to current security policies

## How we ensure maximum efficiency



**Optimized control**  
Load management  
Free cooling maximized  
Fluid distribution

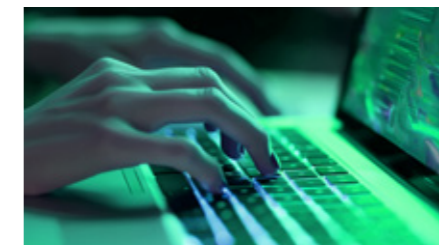

**Maintenance**  
Monitoring  
Diagnostics  
Reporting



**Sharing**  
Connectivity  
Integration

# Industrial Chiller

## How and why to choose an industrial chiller for your applications

### What is an industrial chiller?

Industrial water chillers are used in a variety of applications where chilled water or fluid is circulated through process equipment.

They are characterised by an immediate response to changing load requirements, the ability to modulate their cooling capacity, high control accuracy and reliability even within the limits of their operating conditions.

Industrial chillers are commonly used to cool products and machinery in a multitude of different applications including injection moulding, machine tools, lasers, food, beverage, semi-conductors and more.

### What is the difference between air conditioning chillers and process chillers?

Process chillers are designed to operate at different temperatures, with different fluids and varying flow rates. They have the possibility of integrating several pumps and several hydraulic and cooling circuits; they normally also include a hydraulic tank to compensate for sudden variations in the thermal load on the user side.

This flexibility of use and the high level of reliability are the main factors that differentiate it from air conditioning chillers. The energy efficiency assessment of an industrial chiller follows the rules of European Regulation (EU) 2016/2281 for high temperature chillers (SEPR HT) and (EU) 2015/1095 for medium temperature chillers (SEPR MT).

### Why an industrial chiller?

No industrial process, machine or engine is 100% efficient and heat is the most common by-product of these inefficiencies. If this heat is not removed, it can cause downtime and even premature failure. It is therefore necessary to include cooling in the design of an industrial process to avoid these problems and increase its efficiency and reliability.



**WLA Compact**  
Air cooled  
**1,41 - 5,05 kW**  
R134A  
Compressor rotary/scroll

pag.13



**WRA ErP**  
Air cooled  
**5 - 47,5 kW**  
ErP2021 - R410A - R134A  
Scroll compressor

pag.16



**WLA Precision R410A**  
Air cooled  
**50 - 160 kW**  
ErP2021 - R410A  
Scroll compressor

pag.20



**WLA Precision R32**  
Air cooled  
**50 - 160 kW**  
ErP2021 - F-GAS 2024/573  
R32  
Outdoor  
Scroll compressor

pag.22



**WPA Techno**  
Air cooled  
**165 - 560 kW**  
ErP2021 - R410A - R454B  
Scroll compressor

pag.24



**WPA Mini Techno**  
Air cooled  
**95 - 170 kW**  
ErP2021 - R410A  
Scroll compressor

pag.26



**WSA/WSI Techno**  
Air cooled  
**280 - 1860 kW**  
ErP2021 - R513A - R1234ZE  
Screw compressor

pag.28



**WSW Techno**  
Water cooled  
**236 - 1529 kW**  
ErP2021 - R513A  
Screw compressor

pag.36



**ORA**  
Oil chiller  
**2,1 - 16 kW**  
R407C  
Compressor rotary/scroll

pag.40

# WLA Compact

Air cooled - 1,41 - 5.05 kW  
R134A - Scroll compressor

## Reliability and Precision

The performance of modern **industrial processes** is closely influenced by variations in their operating temperature and can be compromised by dangerous overheating.

The new **WLA Compact** industrial chillers are designed to provide **accurate temperature control** of the process fluid and **reliable operation** in a wide range of industrial applications such as: cooling of machine tools, lasers, presses, extruders, and for the chemical, pharmaceutical, food and medical sectors.

## Main Features

- Cooling capacity: 1.41 to 5.05 kW
- Power supply: 230V - 1ph - 50/60 Hz  
400V - 3ph - 50 Hz  
460V - 3ph - 60Hz
- Operating limits - Standard chiller:
- Outlet water temperature: -5°/+1°C ÷ +13°/+30°C;
- Ambient air temperature: min/max +15°/+45°C
- WLA Compact Process Chillers do not fall within the applicability range of the MT (Medium Temperature – EU 2015/1095) and HT (High Temperature – EU 2016/2281) regulations.

## Technical features - Cooling Circuit

- Cooling fluid R134A
- Piston (mod. 02-03), rotary (mod. 05-08) or scroll (mod. 10-13) compressor
- Plate heat exchangers optimised for high evaporation temperatures
- Finned coil condensers protected by a metal anti-particulate filter and with reduced tube diameter (they reduce the refrigerant charge by about 20%)
- HP high pressure switch with manual reset
- Thermostatic lamination valve

## Technical features - Hydraulic Circuit

- Atmospheric pressure hydraulic circuit constructed from non-ferrous materials
- New HDPE inertia tank with increased volume equipped with visual level indicator, filling/draining connections and overflow
- Automatic bronze bypass valve as standard
- Standard flow switch
- Pressure gauge 0-6 barg



## WLA02-03-05

| CODE                                | M.U.  | WLA02   | WLA03       | WLA05       |                                     |
|-------------------------------------|-------|---------|-------------|-------------|-------------------------------------|
| Cooling Capacity (1)                | @50Hz | kW      | 1,41        | 1,61        | 2,50                                |
| Cooling Capacity                    | @60Hz | kW      | 1,58        | 1,80        | 2,80                                |
| Absorbed power                      | @50Hz | kW      | 0,60        | 0,71        | 0,74                                |
| EER (without pump ) (1)             | @50Hz |         | 2,4         | 2,3         | 3,4                                 |
| Evaporator water flow               | @50Hz | l/min   | 4,0         | 4,6         | 7,2                                 |
| Evaporator pressure drop            | @50Hz | kPa     | 12,0        | 15,3        | 10,5                                |
| Evaporator water flow               | @60Hz | l/min   | 4,5         | 5,2         | 8,0                                 |
| Evaporator pressure drop            | @60Hz | kPa     | 15,1        | 19,2        | 13,1                                |
| <b>Electrical data</b>              |       |         |             |             |                                     |
| Power Supply                        |       | V-ph-Hz | 230-1-50/60 | 230-1-50/60 | 230-1-50/60<br>400-3-50<br>460-3-60 |
| Auxiliaries feed                    |       | V-ph-Hz | 230-1-50/60 | 230-1-50/60 | 230-1-50/60                         |
| IP Protection Degree                |       |         | 40          | 40          | 40                                  |
| <b>Technical Data</b>               |       |         |             |             |                                     |
| N° Compressors /N° Cooling circuits |       |         | 1/1         | 1/1         | 1/1                                 |
| N° Axial fans                       |       |         | 1           | 1           | 1                                   |
| Condenser fan air flow              | @50Hz | m³/h    | 1820        | 1820        | 1820                                |
| Fan absorbed power                  | @50Hz | kW      | 0,13        | 0,13        | 0,13                                |
| Available head P3 Pump              | @50Hz | bar     | 2,4         | 2,3         | 3,9                                 |
| Pump P3 absorbed power              |       | kW      | 0,37        | 0,37        | 0,55                                |
| Noise level (2)                     |       | dB(A)   | 64,1        | 64,1        | 61,9                                |
| Hydraulic connections               |       | Ø       | 1/2"        | 1/2"        | 1/2"                                |
| Tank volume                         |       | dm³     | 8           | 8           | 20                                  |
| Height x Width x Depth              | HxWxD | mm      | 477x601x517 | 477x601x517 | 527x801x632                         |
| Empty weight                        |       | kg      | 54,3        | 54,3        | 75,4                                |

(1) Operating limits for standard chiller: outlet water temperature: +13°/+30°C; ambient air temperature min/max +15°/+45°C  
(2) Sound pressure at 1m: average value obtained in a free field on a reflecting plane at a distance of 10m from the unit according to EN ISO 9614-2. Values with tolerance ± 2 dB.  
(3) Empty weight of the unit with tank and P3 pump without options/kit. Tolerance +/- 10% Refrigerant R134a

## WLA08-10-13

| CODE                                | M.U.  | WLA08   | WLA10                               | WLA13                               |                                     |
|-------------------------------------|-------|---------|-------------------------------------|-------------------------------------|-------------------------------------|
| Cooling Capacity (1)                | @50Hz | kW      | 3,24                                | 4,12                                | 5,05                                |
| Cooling Capacity                    | @60Hz | kW      | 3,63                                | 4,61                                | 5,66                                |
| Absorbed power                      | @50Hz | kW      | 0,93                                | 1,34                                | 1,67                                |
| EER (without pump ) (1)             | @50Hz |         | 3,5                                 | 3,1                                 | 3,0                                 |
| Evaporator water flow               | @50Hz | l/min   | 9,3                                 | 11,8                                | 14,5                                |
| Evaporator pressure drop            | @50Hz | kPa     | 16,4                                | 25,0                                | 36,3                                |
| Evaporator water flow               | @60Hz | l/min   | 10,4                                | 13,2                                | 16,2                                |
| Evaporator pressure drop            | @60Hz | kPa     | 20,5                                | 31,4                                | 45,5                                |
| <b>Electrical data</b>              |       |         |                                     |                                     |                                     |
| Power Supply                        |       | V-ph-Hz | 230-1-50/60<br>400-3-50<br>460-3-60 | 230-1-50/60<br>400-3-50<br>460-3-60 | 230-1-50/60<br>400-3-50<br>460-3-60 |
| Auxiliaries feed                    |       | V-ph-Hz | 230-1-50/60                         | 230-1-50/60                         | 230-1-50/60                         |
| IP Protection Degree                |       |         | 40                                  | 40                                  | 40                                  |
| <b>Technical Data</b>               |       |         |                                     |                                     |                                     |
| N° Compressors /N° Cooling circuits |       |         | 1/1                                 | 1/1                                 | 1/1                                 |
| N° Axial fans                       |       |         | 1                                   | 1                                   | 1                                   |
| Condenser fan air flow              | @50Hz | m³/h    | 1820                                | 3415                                | 3415                                |
| Fan absorbed power                  | @50Hz | kW      | 0,13                                | 0,30                                | 0,30                                |
| Available head P3 Pump              | @50Hz | bar     | 3,7                                 | 3,4                                 | 3,2                                 |
| Pump P3 absorbed power              |       | kW      | 0,55                                | 0,55                                | 0,55                                |
| Noise level (2)                     |       | dB(A)   | 61,9                                | 71,8                                | 71,8                                |
| Hydraulic connections               |       | Ø       | 1/2"                                | 1/2"                                | 1/2"                                |
| Tank volume                         |       | dm³     | 20                                  | 20                                  | 20                                  |
| Height x Width x Depth              | HxWxD | mm      | 527x801x632                         | 527x801x632                         | 527x801x632                         |
| Empty weight                        |       | kg      | 75,4                                | 75,4                                | 75,4                                |

(1) Operating limits for standard chiller: outlet water temperature: +13°/+30°C; ambient air temperature min/max +15°/+45°C  
(2) Sound pressure at 1m: average value obtained in a free field on a reflecting plane at a distance of 10m from the unit according to EN ISO 9614-2. Values with tolerance ± 2 dB.  
(3) Empty weight of the unit with tank and P3 pump without options/kit. Tolerance +/- 10% Refrigerant R134a

# WRA ErP

**Air cooled - 5 - 47,5 kW**  
**ErP2021 - R410A - R134A - Scroll compressor**

## Reliability and energy efficiency

The WRA ERP liquid chillers are the result of a design that has focused on **reliability, energy efficiency, extended operating limits** and **extreme configurability**. Thanks to dedicated technological solutions such as the oversized heat exchangers, the standard electronic expansion valve and the high efficiency fans, each configuration of the WRA ERP chillers is characterized by high thermodynamic performances that **exceed the most stringent minimum energy efficiency requirements** imposed by the Ecodesign directive starting from 2021.

## Energy Efficiency

Process chillers work with high heat loads continuously throughout the year. It is therefore very important that the chiller guarantees the highest performance under all operating conditions. All WRA chillers comply with the limits required by ErP2021 - SEPR HT (EU) 2016/2281 - SEPR MT (EU) 2015/1095, making them the best solution for all process applications

## Extended operating limits

Thanks to the dedicated versions and accessories, operation at full load is guaranteed up to +45 °C outside air temperature during the summer season and -20 °C during the winter season in the LT version. Standard WRA ErP units produce chilled water with a maximum evaporator outlet temperature of up to +30 °C; minimum standard temperature +5 °C and -10 °C in the BRINE version.

## New Configurations

The new LT versions for low ambient temperature -20°C, the Brine version for low water outlet temperature Tw-10°C, and the new version for pressurised hydraulic circuits expand the technical equipment of the WRA ErP range, which is therefore able to meet the most varied application requirements, guaranteeing maximum safety of the production process in which the chiller is integrated. The Process version (mod.0A-5A) includes a shell and tube evaporator.

## General Features

- Cooling Capacity 5 – 47,5 kW
- Power Supply: 400Vac - 3ph - 50Hz  
460Vac - 3ph - 60Hz
- Refrigerant: R134a (mod.13-18) R410A (mod.20-5A)
- IP54 Protection Degree: suitable for outdoor installation
- Scroll compressors
- Plate/shell evaporator
- Non-Ferrous Hydraulic Circuit
- Condenser with finned coil



## WRA13-18-20-25

| CODE                                 | M.U.    | WRA13               | WRA18    | WRA20    | WRA25    |       |
|--------------------------------------|---------|---------------------|----------|----------|----------|-------|
| Cooling Capacity (1)                 | @50Hz   | kW                  | 4,67     | 5,87     | 7,34     | 8,66  |
| Absorbed Power ca (1)                | @50Hz   | kW                  | 1,10     | 1,49     | 1,93     | 2,33  |
| Evaporator water flow (1)            | @50Hz   | l/min               | 13,4     | 16,8     | 21,0     | 24,8  |
| EER (without pump) (1)               |         |                     | 4,2      | 3,9      | 3,8      | 3,7   |
| SEPR HT (3)                          |         |                     | 5,38     | 5,42     | 5,45     | 5,18  |
| Cooling Capacity (2)                 | @50Hz   | kW                  | 3,40     | 4,35     | 5,63     | 6,58  |
| Absorbed Power (2)                   | @50Hz   | kW                  | 1,13     | 1,50     | 1,95     | 2,41  |
| Evaporator water flow (2)            | @50Hz   | l/min               | 9,7      | 12,5     | 16,1     | 18,9  |
| EER (without pump) (2)               | @50Hz   |                     | 3,0      | 2,9      | 2,9      | 2,7   |
| <b>Electrical data</b>               |         |                     |          |          |          |       |
| Power Supply                         | V-ph-Hz | 400/3/50            | 400/3/50 | 400/3/50 | 400/3/50 |       |
| Power Supply                         | V-ph-Hz | 400/3/50 - 460/3/60 |          |          |          |       |
| Auxiliaries feed                     | V-ph-Hz | 24VAC               | 24VAC    | 24VAC    | 24VAC    |       |
| IP Protection Degree                 |         | IP54                | IP54     | IP54     | IP54     |       |
| <b>Technical Data</b>                |         |                     |          |          |          |       |
| N° Compressors / N° Cooling circuits |         | 1/1                 | 1/1      | 1/1      | 1/1      |       |
| N° Axial Fans                        |         | 1                   | 1        | 1        | 1        |       |
| Pump P3 absorbed power               | @50Hz   | kW                  | 0,46     | 0,46     | 0,46     | 0,46  |
| Noise Level (4)                      |         | dB(A)               | 37,5     | 37,5     | 40,4     | 40,4  |
| Hydraulic connections                |         | Ø                   | 3/4"G    | 3/4"G    | 3/4"G    | 3/4"G |
| Tank Volume                          |         | dm <sup>3</sup>     | 40       | 40       | 40       | 40    |
| Height                               |         | mm                  | 1290     | 1290     | 1310     | 1310  |
| Width                                |         | mm                  | 560      | 560      | 560      | 560   |
| Depth                                |         | mm                  | 720      | 720      | 720      | 720   |
| Operating weight (5)                 |         | kg                  | 178      | 185      | 188      | 190   |
| Shipping weight (5)                  |         | kg                  | 133      | 140      | 143      | 145   |

(1) Data referring to outlet water inlet temperature 20/15°C - Air temperature 32°C. @50Hz  
(2) Data referring to outlet water inlet temperature 12/7°C - Air temperature 35°C. @50Hz  
(3) Data declared according to European Regulation (EU) 2016/2281 for high temperature process chillers  
(4) Sound pressure at 10m: average value obtained in a free field on a reflecting plane at a distance of 10m from the unit according to EN ISO 9614-2. Values with tolerance ± 2 dB.  
(5) Weight of the unit with tank and P3 pump without options/kit. Tolerance +/-10%.

## WRA30-35-50

| CODE                                 | M.U.    | WRA30               | WRA35    | WRA50    |       |
|--------------------------------------|---------|---------------------|----------|----------|-------|
| Cooling Capacity (1)                 | @50Hz   | kW                  | 11,78    | 13,66    | 16,66 |
| Absorbed Power ca (1)                | @50Hz   | kW                  | 2,82     | 3,31     | 4,45  |
| Evaporator water flow (1)            | @50Hz   | l/min               | 33,8     | 39,2     | 47,8  |
| EER (without pump) (1)               |         |                     | 4,2      | 4,1      | 3,7   |
| SEPR HT (3)                          |         |                     | 5,52     | 5,54     | 5,37  |
| Cooling Capacity (2)                 | @50Hz   | kW                  | 9,01     | 10,3     | 12,66 |
| Absorbed Power (2)                   | @50Hz   | kW                  | 2,92     | 3,395    | 4,42  |
| Evaporator water flow (2)            | @50Hz   | l/min               | 25,8     | 29,5     | 36,3  |
| EER (without pump) (2)               | @50Hz   |                     | 3,1      | 3,0      | 2,9   |
| <b>Electrical data</b>               |         |                     |          |          |       |
| Power Supply                         | V-ph-Hz | 400/3/50            | 400/3/50 | 400/3/50 |       |
| Power Supply                         | V-ph-Hz | 400/3/50 - 460/3/60 |          |          |       |
| Auxiliaries feed                     | V-ph-Hz | 24VAC               | 24VAC    | 24VAC    |       |
| IP Protection Degree                 |         | IP54                | IP54     | IP54     |       |
| <b>Technical Data</b>                |         |                     |          |          |       |
| N° Compressors / N° Cooling circuits |         | 1/1                 | 1/1      | 1/1      |       |
| N° Axial Fans                        |         | 1                   | 1        | 1        |       |
| Pump P3 absorbed power               | @50Hz   | kW                  | 0,69     | 0,69     | 0,69  |
| Noise Level (4)                      |         | dB(A)               | 46,9     | 46,9     | 47,9  |
| Hydraulic connections                |         | Ø                   | 1"G      | 1"G      | 1"G   |
| Tank Volume                          |         | dm <sup>3</sup>     | 98       | 98       | 98    |
| Height                               |         | mm                  | 1550     | 1550     | 1550  |
| Width                                |         | mm                  | 740      | 740      | 740   |
| Depth                                |         | mm                  | 930      | 930      | 930   |
| Operating weight (5)                 |         | kg                  | 311      | 311      | 314   |
| Shipping weight (5)                  |         | kg                  | 201      | 200      | 204   |

(1) Data referring to outlet water inlet temperature 20/15°C - Air temperature 32°C. @50Hz  
(2) Data referring to outlet water inlet temperature 12/7°C - Air temperature 35°C. @50Hz  
(3) Data declared according to European Regulation (EU) 2016/2281 for high temperature process chillers  
(4) Sound pressure at 10m: average value obtained in a free field on a reflecting plane at a distance of 10m from the unit according to EN ISO 9614-2. Values with tolerance ± 2 dB.  
(5) Weight of the unit with tank and P3 pump without options/kit. Tolerance +/-10%.

## WRA55-65-80-90

| CODE                                 |       | M.U.            | WRA55               | WRA65    | WRA80    | WRA90    |
|--------------------------------------|-------|-----------------|---------------------|----------|----------|----------|
| Cooling Capacity (1)                 | @50Hz | kW              | 19,49               | 22,26    | 27,05    | 31,82    |
| Absorbed Power ca (1)                | @50Hz | kW              | 4,59                | 5,25     | 6,73     | 7,79     |
| Evaporator water flow (1)            | @50Hz | l/min           | 55,9                | 63,8     | 77,5     | 91,2     |
| EER (without pump) (1)               |       |                 | 4,25                | 4,24     | 4,02     | 4,09     |
| SEPR HT (3)                          |       |                 | 6,37                | 5,76     | 5,69     | 5,53     |
| Cooling Capacity (2)                 | @50Hz | kW              | 14,9                | 17,1     | 20,96    | 24,65    |
| Absorbed Power (2)                   | @50Hz | kW              | 4,65                | 5,3      | 6,65     | 7,68     |
| Evaporator water flow (2)            | @50Hz | l/min           | 42,7                | 49,0     | 60,1     | 70,7     |
| EER (without pump) (2)               | @50Hz |                 | 3,20                | 3,2      | 3,2      | 3,21     |
| <b>Electrical data</b>               |       |                 |                     |          |          |          |
| Power Supply                         |       | V-ph-Hz         | 400/3/50            | 400/3/50 | 400/3/50 | 400/3/50 |
| Power Supply                         |       | V-ph-Hz         | 400/3/50 - 460/3/60 |          |          |          |
| Auxiliaries feed                     |       | V-ph-Hz         | 24VAC               | 24VAC    | 24VAC    | 24VAC    |
| IP Protection Degree                 |       |                 | IP54                | IP54     | IP54     | IP54     |
| <b>Technical Data</b>                |       |                 |                     |          |          |          |
| N° Compressors / N° Cooling circuits |       |                 | 1/1                 | 1/1      | 1/1      | 1/1      |
| N° Axial Fans                        |       |                 | 1                   | 1        | 1        | 1        |
| Pump P3 absorbed power               | @50Hz | kW              | 0,92                | 0,92     | 1,31     | 1,31     |
| Noise Level (4)                      |       | dB(A)           | 41,9                | 42,5     | 44,3     | 43,9     |
| Hydraulic connections                |       | ∅               | 1"1/4 G             | 1"1/4 G  | 1"1/4 G  | 1"1/4 G  |
| Tank Volume                          |       | dm <sup>3</sup> | 180                 | 180      | 180      | 180      |
| Height                               |       | mm              | 1992                | 1992     | 1992     | 1992     |
| Width                                |       | mm              | 895                 | 895      | 895      | 895      |
| Depth                                |       | mm              | 1175                | 1175     | 1175     | 1175     |
| Operating weight (5)                 |       | kg              | 560                 | 572      | 572      | 580      |
| Shipping weight (5)                  |       | kg              | 400                 | 412      | 412      | 420      |

(1) Data referring to outlet water inlet temperature 20/15°C - Air temperature 32°C. @50Hz  
(2) Data referring to outlet water inlet temperature 12/7°C - Air temperature 35°C. @50Hz  
(3) Data declared according to European Regulation (EU) 2016/2281 for high temperature process chillers  
(4) Sound pressure at 10m: average value obtained in a free field on a reflecting plane at a distance of 10m from the unit according to EN ISO 9614-2. Values with tolerance ± 2 dB.  
(5) Weight of the unit with tank and P3 pump without options/kit. Tolerance +/-10%.

## WRA0A-5A

| CODE                                 |       | M.U.            | WRA0A*              | WRA5A*   | WRA0A**  | WRA5A**  |
|--------------------------------------|-------|-----------------|---------------------|----------|----------|----------|
| Cooling Capacity (1)                 | @50Hz | kW              | 39,94               | 48,16    | 39,48    | 47,39    |
| Absorbed Power ca (1)                | @50Hz | kW              | 8,67                | 11,26    | 8,65     | 11,20    |
| Evaporator water flow (1)            | @50Hz | l/min           | 114,5               | 138,1    | 113,2    | 135,9    |
| EER (without pump) (1)               |       |                 | 4,61                | 4,28     | 4,56     | 4,23     |
| SEPR HT (3)                          |       |                 | 5,92                | 5,66     | 5,8      | 5,51     |
| Cooling Capacity (2)                 | @50Hz | kW              | 30,67               | 37,22    | 29,94    | 36,09    |
| Absorbed Power (2)                   | @50Hz | kW              | 8,61                | 11,07    | 8,58     | 10,96    |
| Evaporator water flow (2)            | @50Hz | l/min           | 87,9                | 106,7    | 85,8     | 103,5    |
| EER (without pump) (2)               | @50Hz |                 | 3,56                | 3,36     | 3,49     | 3,29     |
| <b>Electrical data</b>               |       |                 |                     |          |          |          |
| Power Supply                         |       | V-ph-Hz         | 400/3/50            | 400/3/50 | 400/3/50 | 400/3/50 |
| Power Supply                         |       | V-ph-Hz         | 400/3/50 - 460/3/60 |          |          |          |
| Auxiliaries feed                     |       | V-ph-Hz         | 24VAC               | 24VAC    | 24VAC    | 24VAC    |
| IP Protection Degree                 |       |                 | IP54                | IP54     | IP54     | IP54     |
| <b>Technical Data</b>                |       |                 |                     |          |          |          |
| N° Compressors / N° Cooling circuits |       |                 | 1/1                 | 1/1      | 1/1      | 1/1      |
| N° Axial Fans                        |       |                 | 2                   | 2        | 2        | 2        |
| Pump P3 absorbed power               | @50Hz | kW              | 1,76                | 1,76     | 1,76     | 1,76     |
| Noise Level (4)                      |       | dB(A)           | 45,4                | 47       | 45,4     | 47,00    |
| Hydraulic connections                |       | ∅               | 1"1/2 G             | 1"1/2 G  | 1"1/2 G  | 1"1/2 G  |
| Tank Volume                          |       | dm <sup>3</sup> | 300                 | 300      | 250      | 250      |
| Height                               |       | mm              | 2074                | 2074     | 2074     | 2074     |
| Width                                |       | mm              | 1140                | 1140     | 1140     | 1140     |
| Depth                                |       | mm              | 2084                | 2084     | 2084     | 2084     |
| Operating weight (5)                 |       | kg              | 890                 | 910      | 950      | 970      |
| Shipping weight (5)                  |       | kg              | 610                 | 630      | 710      | 730      |

\* STANDARD version with plate evaporator  
\*\* PROCESS version with shell and tube evaporator  
(1) Data referring to outlet water inlet temperature 20/15°C - Air temperature 32°C. @50Hz  
(2) Data referring to outlet water inlet temperature 12/7°C - Air temperature 35°C. @50Hz  
(3) Data declared according to European Regulation (EU) 2016/2281 for high temperature process chillers  
(4) Sound pressure at 10m: average value obtained in a free field on a reflecting plane at a distance of 10m from the unit according to EN ISO 9614-2. Values with tolerance ± 2 dB.  
(5) Weight of the unit with tank and P3 pump without options/kit. Tolerance +/-10%.

# WLA Precision R410A

Air cooled - 50-160 kW

ErP2021 - R410A - Scroll compressor

## Compact, reliable, and versatile

The range of **WLA Precision ErP** industrial liquid chillers is designed to ensure the high reliability standards required by 24/7 manufacturing processes and perfectly meets the needs of applications demanding high quality and reliability standards. Thanks to careful design and dedicated technological solutions such as high-efficiency evaporators and condensers, the standard electronic expansion valve, and the new high-efficiency axial fans, the **WLA Precision ErP** range stands out for its high performance, surpassing minimum energy efficiency requirements set by the European ErP Ecodesign directive.

## Refrigeration Circuit

- Compliance with ErP 2021- SEPR HT (EU) 2016/2281- SEPR MT (EU) 2015/1095 regulations;
- Hermetic scroll compressors protected by a phase sequence control relay and equipped with an oil crankcase heater;
- Refrigerant: R410A (Indoor - Outdoor);
- Plate type evaporators in AISI 316 stainless steel;
- Fin-tube condensers (copper tubes / aluminum fins) with mini-tube technology;
- HP/LP pressure switches;
- High-pressure transducer;
- Electronic Expansion Valve EEV;
- Axial fans with PP technopolymer corrosion-resistant blades and electronic speed regulation by phase-cutting;
- High and low-pressure safety valves;

## Hydraulic Circuit

- AISI304 inertial tank dustproof with visual level indicator, connections for loading/discharging, overflow, and level switch;
- Automatic hydraulic bypass valve in brass standard;
- Standard adjustable automatic brass hydraulic bypass valve;
- Evaporator antifreeze protection: standard differential pressure switch and antifreeze probe;
- Pressure gauge 0-6 barg;
- Process version with pressurised hydraulic circuit and shell and tube evaporator
- BRINE version -10°C
- LASER version
- LT version -20° ambient

## Electrical Panel

- Design and construction in compliance with EN 60204 regulations;
- Main switch with door lock;
- Automatic switches and contactors;
- IP44 protection level: suitable for outdoor installation (optional IP54 version);
- Phase monitor standard;
- Clean contacts: ON/OFF remote; general alarm;
- Labeled electrical cables;
- Standard active ventilation system: includes a heating resistor and ventilation grilles.



## WLA5A-8A-0B-4B-7B-0C-5C-0D-5D

| CODE  | WLA5A                 | WLA8A   | WLA0B   | WLA4B          | WLA7B   | WLA0C   | WLA5C          | WLA0D   | WLA5D   |
|---|-----------------------|---------|---------|----------------|---------|---------|----------------|---------|---------|
| <b>Performance @50hz</b>                              |                       |         |         |                |         |         |                |         |         |
| Cooling capacity (1) [kW]                             | 50,14                 | 60,72   | 77,56   | 84,61          | 98,12   | 109,53  | 131,87         | 145,69  | 159,79  |
| Total absorbed power (1) [kW]                         | 12,51                 | 16,27   | 18,77   | 20,55          | 24,00   | 28,02   | 30,67          | 34,34   | 38,99   |
| Evaporating water flow - STANDARD version (1) [l/min] | 143,7                 | 174,1   | 222,3   | 242,6          | 281,3   | 314,0   | 378,0          | 417,6   | 458,1   |
| Evaporating water flow - PROCESS version (1) [l/min]  | 108,9                 | 134,5   | 165,6   | 180,3          | 213,2   | 240,7   | 283,8          | 317,0   | 351,9   |
| EER (excluding pump) (1)                              | 4,01                  | 3,73    | 4,13    | 4,12           | 4,09    | 3,91    | 4,30           | 4,24    | 4,10    |
| Cooling capacity (2) [kW]                             | 38,39                 | 47,03   | 59,56   | 64,76          | 75,31   | 84,47   | 100,94         | 111,76  | 123,39  |
| Total absorbed power (2) [kW]                         | 12,38                 | 16,00   | 18,75   | 20,59          | 23,85   | 27,58   | 30,72          | 34,41   | 39,00   |
| EER (excluding pump) (2)                              | 3,10                  | 2,94    | 3,18    | 3,15           | 3,16    | 3,06    | 3,29           | 3,25    | 3,16    |
| SEPR HT (3)   | 5,78                  | 5,36    | 5,05    | 5,24           | 5,45    | 5,33    | 5,42           | 5,40    | 5,38    |
| <b>Electrical data</b>                                |                       |         |         |                |         |         |                |         |         |
| Unit power supply [V/Ph/Hz]                           | 400/3/50              |         |         |                |         |         |                |         |         |
| Auxiliary power supply [V/Ph/Hz]                      | 24 VAC                |         |         |                |         |         |                |         |         |
| IP protection rating                                  | IP44 (IP54 opzionale) |         |         |                |         |         |                |         |         |
| <b>Technical Data</b>                                 |                       |         |         |                |         |         |                |         |         |
| Refrigerant Gas                                       | R410A                 |         |         |                |         |         |                |         |         |
| Number of compressors/circuits                        | 2/1                   |         |         |                |         |         |                |         |         |
| Number of axial fans x impeller diameter              | 2 x $\phi$ 630        |         |         | 2 x $\phi$ 800 |         |         | 3 x $\phi$ 800 |         |         |
| Air flow (single fan) [m <sup>3</sup> /h]             | 10800                 | 10800   | 20700   | 20700          | 20100   | 20100   | 20100          | 20100   | 20100   |
| Pump P3 - Fluid flow rate min/max [l/min]             | 79,5/233              | 133/364 | 121/400 | 121/400        | 165/483 | 165/483 | 165/483        | 165/483 | 165/483 |
| Pump P3 Head min/max [kPa]                            | 122/427               | 3/364   | 42/376  | 51/377         | 4/392   | 16/394  | 187/548        | 187/548 | 268/692 |
| Pump P5 INVERTER - Fluid flow rate min/max [l/min]    | 10/300                |         |         | 20/440         |         |         | 40/580         |         |         |
| Pump P5 INVERTER - Head min/max [kPa]                 | 30/680                |         |         | 30/720         |         |         | 20/780         |         |         |
| Sound pressure level [dB(A)] (4)                      | 47,8                  | 47,5    | 50,4    | 51,1           | 51,5    | 51,9    | 55,1           | 56,6    | 56,6    |
| <b>Dimensions &amp; Weights</b>                       |                       |         |         |                |         |         |                |         |         |
| [Rp]  | 1" 1/2                | 2"      | 2"      | 2"             | 2"      | 2"1/2   | 2"1/2          | 2"1/2   | 2"1/2   |
| Tank volume - STANDARD version [dm <sup>3</sup> ]     | 300                   |         |         |                |         |         |                |         |         |
| Tank volume - PROCESS version [dm <sup>3</sup> ]      | 250                   |         |         |                |         |         | 480            |         |         |
| Width [mm]  | 1135                  | 1135    | 1135    | 1135           | 1135    | 1135    | 1135           | 1135    | 1135    |
| Depth [mm]  | 2468                  | 2468    | 2468    | 2468           | 2468    | 2468    | 3468           | 3468    | 3468    |
| Height [mm]   | 2140                  | 2140    | 2178    | 2178           | 2178    | 2178    | 2178           | 2178    | 2178    |
| Empty weight - STANDARD version [kg] (5)              | 740                   | 760     | 800     | 840            | 850     | 860     | 1100           | 1140    | 1149    |
| Operating weight - STANDARD version [kg] (5)          | 1040                  | 1060    | 1100    | 1140           | 1150    | 1160    | 1400           | 1440    | 1449    |
| Empty weight - PROCESS version [kg] (6)               | 1180                  | 1180    | 1240    | 1290           | 1320    | 1320    | 1690           | 1690    | 1690    |
| Operating weight - PROCESS version [kg] (6)           | 1480                  | 1480    | 1540    | 1590           | 1620    | 1620    | 2240           | 2240    | 2240    |

(1) Data referred to: Water temperature inlet/outlet 20/15°C, Ambient air temperature +32°C, power supply 50Hz.  
 (2) Data referred to: Water temperature inlet/outlet 12/7°C, Ambient air temperature +35°C, power supply 50Hz.  
 (3) Data declared according to the European regulation (EU) 2016/2281 for high-temperature process coolers.  
 (4) Sound pressure at 10m: average value obtained in free field on a reflecting plane at a distance of 10m from the unit according to EN ISO 9614-2. Values with tolerance  $\pm$ 2 dB.  
 (5) Weight of the unit in STANDARD configuration: atmospheric evaporating plates + tank + pump P3 without options/accessories. Tolerance +/-10%.  
 (6) Weight of the unit in PROCESS configuration: tube bundle evaporator + tank + pump P3 without options/accessories. Tolerance +/-10%.

# WLA Precision R32

**Air cooled - 60-160 kW**  
**ErP2021 - R32 - Scroll compressor**

## Compact, reliable, and versatile

The range of **WLA Precision ErP** for outdoor applications industrial liquid chillers is designed to ensure the high reliability standards required by 24/7 manufacturing processes and perfectly meets the needs of applications demanding high quality and reliability standards.

Thanks to careful design and dedicated technological solutions such as high-efficiency evaporators and condensers, the standard electronic expansion valve, and the new high-efficiency axial fans, the **WLA Precision ErP** range stands out for its high performance, surpassing minimum energy efficiency requirements set by the European ErP Ecodesign directive.

## Refrigeration Circuit

- Compliance with ErP 2021- SEPR HT (EU) 2016/2281- SEPR MT (EU) 2015/1095 regulations;
- In accordance with F-Gas Regulation 2024/573
- Hermetic scroll compressors protected by a phase sequence control relay and equipped with an oil crankcase heater;
- Refrigerant: R32 (outdoor);
- Plate type evaporators in AISI 316 stainless steel;
- Fin-tube condensers;
- HP/LP pressure switches;
- High-pressure transducer;
- Electronic Expansion Valve EEV;
- Axial fans with PP technopolymer corrosion-resistant blades and electronic speed regulation by phase-cutting;
- High and low-pressure safety valves;

## Hydraulic Circuit

- AISI304 inertial tank dustproof with visual level indicator, connections for loading/discharging, overflow, and level switch;
- Automatic hydraulic bypass valve in brass standard;
- Standard adjustable automatic brass hydraulic bypass valve;
- Evaporator antifreeze protection: standard differential pressure switch and antifreeze probe;
- Pressure gauge 0-6 barg;
- Process version with pressurised hydraulic circuit and shell and tube evaporator
- BRINE version -10°C
- LASER version
- LT version -20° ambient

## Electrical Panel

- Design and construction in compliance with EN 60204 regulations;
- Main switch with door lock;
- Automatic switches and contactors;
- IP54 protection level: suitable for outdoor installation;
- Phase monitor standard;
- Clean contacts: ON/OFF remote; general alarm;
- Labeled electrical cables;
- Standard active ventilation system: includes a heating resistor and ventilation grilles.



## WLA-8A-0B-4B-7B-0C-5C-0D-5D

| CODE  | WLA8A    | WLA0B | WLA4B | WLA7B | WLA0C  | WLA5C  | WLA0D  | WLA5D  |
|---|----------|-------|-------|-------|--------|--------|--------|--------|
| <b>Performance @50hz</b>  |          |       |       |       |        |        |        |        |
| Cooling capacity W20-15L32(1) [kW]  | 60,00    | 74,00 | 83,00 | 99,00 | 115,00 | 127,00 | 143,00 | 158,00 |
| Power input W20-15L32(2) [kW]   | 14,48    | 16,89 | 18,86 | 23,24 | 28,61  | 27,60  | 32,41  | 38,15  |
| EER W20-15L32   | 4,14     | 4,38  | 4,40  | 4,26  | 4,02   | 4,60   | 4,41   | 4,14   |
| Cooling capacity W12-7L35(1) [kW]   | 45,89    | 57,07 | 63,98 | 76,66 | 90,38  | 98,76  | 111,64 | 124,19 |
| Power input W12-7L35(2) [kW]  | 14,68    | 17,93 | 19,98 | 24,23 | 29,31  | 29,19  | 33,78  | 39,24  |
| EER W12-7L35  | 3,13     | 3,18  | 3,20  | 3,16  | 3,08   | 3,38   | 3,30   | 3,16   |
| SEPR HT According to (EU) 2016/2281   | 5,36     | 5,05  | 5,24  | 5,45  | 5,33   | 5,42   | 5,40   | 5,38   |
| <b>Electrical Data</b>  |          |       |       |       |        |        |        |        |
| Rated power supply [V/ph/Hz]  | 400/3/50 |       |       |       |        |        |        |        |
| Rated auxiliary supply  | 24 VAC   |       |       |       |        |        |        |        |
| <b>Technical Data</b>   |          |       |       |       |        |        |        |        |
| Refrigerant   | R32      |       |       |       |        |        |        |        |
| No. of compressors/circuits   | 2 / 1    |       |       |       |        |        |        |        |
| No. of fans   | 2        |       |       |       | 3      |        |        |        |
| Fan diameter [mm]   | 630      | 800   | 800   | 800   | 800    | 800    | 800    | 800    |
| Air flow rate (single fan) [m³/h]   | 10800    | 20700 | 20700 | 20100 | 20100  | 20100  | 20100  | 20100  |
| Sound pressure level at 10 m(7) [dB(A)]   | 47,0     | 54,7  | 52,3  | 52,9  | 53,4   | 54,6   | 55,0   | 55,8   |
| Hydraulic connection diameter ["]   | 2"       | 2"    | 2"    | 2"    | 2"     | 2"1/2  | 2"1/2  | 2"1/2  |
| <b>Dimensions and Weights</b>   |          |       |       |       |        |        |        |        |
| Transport weight [kg] (tank, pump P3, no accessories)                                   | 760      | 800   | 840   | 850   | 860    | 1100   | 1140   | 1149   |
| Operating weight [kg] (tank, pump P3, no accessories)                                   | 1060     | 1100  | 1140  | 1150  | 1160   | 1400   | 1440   | 1449   |
| Transport weight [kg] (shell and tube exchanger, storage tank, pump P3, no accessories) | 1180     | 1240  | 1290  | 1320  | 1320   | 1690   | 1690   | 1690   |
| Operating weight [kg] (shell and tube exchanger, storage tank, pump P3, no accessories) | 1480     | 1540  | 1590  | 1620  | 1620   | 2240   | 2240   | 2240   |
| Height [mm]   | 2048     | 2178  | 2178  | 2178  | 2178   | 2178   | 2178   | 2178   |
| Width [mm]  | 1135     | 1135  | 1135  | 1135  | 1135   | 1135   | 1135   | 1135   |
| Depth [mm]  | 2563     | 2563  | 2563  | 2563  | 2563   | 3563   | 3563   | 3563   |
| Tank capacity - STD version [dm³]   | 300      |       |       |       |        |        |        |        |
| Tank capacity - PROCESS version [dm³]   | 250      |       |       |       | 480    |        |        |        |

(1) At the evaporator, according to EN14511-2018

(2) Pump excluded

(3) Data considered with water

(4) W20-15L32

(5) W12-7L35

(6) At maximum speed

(7) Sound power level measured in accordance with EN ISO 9614. The data refer to the standard unit (without options), at full load and under the nominal conditions indicated in the manual.

## Options

- **EC fans:** EC axial fans inverter-driven brushless synchronous moto with setpless speed variation from 10% to 100%
- **Protective enclosure for hydraulic/refrigeration vane:** complete panelling of the hydraulic and refrigeration compartments
- **Heating element:** it prevents the icing of chilled water in case the chiller is not running. At certain ambient temperatures and water temperatures, Cosmotec is recommending the use of ethylene or propylene glycol.
- **Automatic filling:** kit for the automatic filling of the tank, installed on water adduction piping. It's main function is to maintain stable the pressure of the plant, to a pre-fixed value, automatically providing water in-taking. Two models are available, one for version with atmospheric tank and one for version with pressure tank.
- **Condensing coil protection grids:** powder-coated anti-intrusion metal grilles, with meshes designed to guarantee the correct air flow in the condensers and simultaneously preventing access to the components of the condensing section of the unit.
- **Aluminium air filter:** aluminium air filters are mounted on the condensing coils of the unit. They have a frame in galvanized sheet 0,6 mm thick and aluminium net on each side.
- **Gas taps safety valves:** when this option is ordered, a shut-off ball valve is used to shut off safety valves in the event of their maintenance or replacement.
- **Electronic flow switch:** it allows the constant monitoring of the fluid circulation in the chilled water circuits. It reports an eventual absence of fluid circulation, to avoid the freezing of the evaporator.
- **Under-user level installation:** it allows the installation of the chiller with free water level tank under application level, avoiding the overflowing of the tank when the pump is stopped.
- **Anticorrosive treatment of condensing coils:** the additional protection treatment of the finned coils guarantees correct functioning in aggressive environments. The treatment is carried out through two phases: pre-painting treatment: the battery fins are made and protected of pre-painted aluminium e painting with acrylic powders: once assembled, the entire exchanger is painted with acrylic powders in RAL 7001 or 7005 color and subjected to a polymerization process in special ovens.

## Accessories

- **Aluminium air filter kit:** N°6 or N°10 aluminium air filter and screws and upper supports for the installation
- **Remote ambient probe (10m cable):** it's a remote air temperature probe with 10m cable.
- **External water filter:** is composed by the cartridge, the holder and the header. The cartridge is the body and the filtering metal mesh, made of stainless steel AISI 304. The meshes and the structure permit a uniform water flow and few load losses.
- **External flow swtich:** allows the constant monitoring of the fluid circulation in the chilled water circuits. It reports an eventual absence of fluid circulation.
- **Antivibration spring kit:** Kit composed of springs in harmonic steel, zinc steel plates containing the springs and jack in zinc steel
- **Antivibration earthquake isolation kit:** the mount main structural components are lid, intermediate plate, base, springs and retaining/anchoring screws.
- **Adjustment feet kit:** kit composed by levelling foots,galvanised nuts and galvanized washers
- **Condensing coil protection grid kit:** powder-coated anti-intrusion metal grilles for preventing access to the components of the condensing section of the unit.
- **Condensing coil and hydraulic vane protection grid kit:** powder-coated anti-intrusion metal grilles for preventing access to the components of the condensing section of the unit and hydraulic compartments

# WPA e WPA Mini - Techno Range

## Air cooled - Scroll compressor

WPA: 165-560 kW - R410A - R454B / WPA mini: 95-170 kW - R410A

Liquid chillers designed for cooling process applications 24/7, 365 days a year, air-cooled with two refrigeration circuits and scroll compressors installed in tandem/trio optimized for the use of R410A/R454B, plate/tube bundle evaporators, and cooling capacities from 95 kW to 560 kW. Cosmotec's experience in process cooling has led to the development of this range of industrial chillers capable of meeting the broad operational limits (both on the environment and user sides) required by new technologies used for energy saving. All chillers in the WP range feature high levels of energy efficiency (Class A or B) and comply with the limits required by Directive 2009/125/EC Ecodesign ErP 2021.

### Refrigeration Circuit

- Cooling capacity: WPA: 165 - 560 kW - WPA mini: 95 - 170 kW
- Refrigerant: R410A (WPAmini / WPA); R454B (WPA)
- Two redundant and independent refrigeration circuits, for maximum reliability
- Brazed plate evaporator in stainless steel AISI 316 (WPAmini 030-055; WPA 060-140)
- Direct expansion shell and tube evaporator (WPA 160-200)
- Micro-Channel condensers entirely made of long-lasting aluminum (HA9153A) and installed in a "V" geometry
- Free Cooling coils copper-aluminum + 2 low-pressure drop modulating two-way valves
- Electronic Expansion Valve (EEV)
- Axial fan with low noise and high fluid dynamic efficiency, with speed regulation via phase-cut module
- High and low-pressure safety valves on the refrigerant side

### Hydraulic Circuit

- Pressure accumulation tank in steel, coated with elastomeric insulating material
- Hydraulic circuit composed of painted steel pipes coated with insulating material
- Victaulic® connections for supply and return
- Evaporator anti-freeze protection: standard differential pressure switch and anti-freeze probe

### Electrical panel

- Design and construction in compliance with EN 60204 standards
- Main switch with door interlock
- Automatic switches and contactors
- Protection degree IP54: suitable for outdoor installation
- Standard phase monitor
- Clean contacts: remote ON/OFF; general alarm
- Labeled electrical cables
- SEC.blue electronic controller with graphic display (WPAmini) or 7" color Touch-screen display (WPA)

### LOW GWP version with low environmental impact

The WPA units (WPAmini on request) are available with low environmental impact R454B refrigerant, which ensures a reduction in global warming potential (GWP = 467). Classified as A2L, R454B is non-toxic but slightly flammable, in PED 1 safety group.

### Free Cooling for energy saving

WPA and WPAmini chillers are available in an integrated Free Cooling version, which allows significant energy savings, especially in applications requiring high coolant temperatures (plastics, data centers) and installation in areas with cold or temperate climates (minimum temperature -20°C). By utilizing external air to cool the fluid, the Free Cooling system can completely replace the refrigeration circuit, thus allowing the compressors to be turned off..



## WPAmini Standard

| CODE                         |        | M.U. | WPA030             |         | WPA045             |         | WPA050             |         | WPA055             |         |
|------------------------------|--------|------|--------------------|---------|--------------------|---------|--------------------|---------|--------------------|---------|
| Cooling capacity             | W15L32 | kW   | 105,9              |         | 136,7              |         | 168,6              |         | 192,9              |         |
| Absorbed power               | W15L32 | kW   | 24,6               |         | 34,8               |         | 40,7               |         | 58,3               |         |
| SEPR                         |        |      | 5,59               |         | 5,29               |         | 5,52               |         | 5,62               |         |
| Cooling capacity             | W7L35  | kW   | 83                 |         | 107                |         | 132                |         | 151                |         |
| Absorbed power               | W7L35  | kW   | 25                 |         | 35                 |         | 41                 |         | 49                 |         |
| Refrigerant Gas              |        |      | R410A              |         | R410A              |         | R410A              |         | R410A              |         |
| Refrigerant Gas charge       |        | kg   | 8 + 8              |         | 11 + 11            |         | 14 + 14            |         | 16 + 16            |         |
| Cooling circuits/Compressors |        | N°   | 2 / 4              |         | 2 / 4              |         | 2 / 4              |         | 2 / 4              |         |
| Rated voltage                |        | V~   | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 |
| Nominal Frequency            |        | Hz   | 50                 | 60      | 50                 | 60      | 50                 | 60      | 50                 | 60      |
| Height x Width x Depth       |        | mm   | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         |
| Shipping weight              |        | kg   | 1190               |         | 1250               |         | 1275               |         | 1340               |         |

## WPAmini Low Noise

| CODE                         |        | M.U. | WPA030             |         | WPA045             |         | WPA050             |         | WPA055             |         |
|------------------------------|--------|------|--------------------|---------|--------------------|---------|--------------------|---------|--------------------|---------|
| Cooling capacity             | W15L32 | kW   | 103                |         | 132,2              |         | 162,7              |         | 183,5              |         |
| Absorbed power               | W15L32 | kW   | 24,8               |         | 36                 |         | 41,6               |         | 60,5               |         |
| SEPR                         |        |      | 5,69               |         | 5,34               |         | 5,63               |         | 5,82               |         |
| Cooling capacity             | W7L35  | kW   | 80                 |         | 102                |         | 126                |         | 143                |         |
| Absorbed power               | W7L35  | kW   | 25                 |         | 36                 |         | 43                 |         | 51                 |         |
| Refrigerant Gas              |        |      | R410A              |         | R410A              |         | R410A              |         | R410A              |         |
| Refrigerant Gas charge       |        | kg   | 8 + 8              |         | 10 + 10            |         | 13 + 13            |         | 15 + 15            |         |
| Cooling circuits/Compressors |        | N°   | 2 / 4              |         | 2 / 4              |         | 2 / 4              |         | 2 / 4              |         |
| Rated voltage                |        | V~   | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 |
| Nominal Frequency            |        | Hz   | 50                 | 60      | 50                 | 60      | 50                 | 60      | 50                 | 60      |
| Height x Width x Depth       |        | mm   | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         |
| Shipping weight              |        | kg   | 1205               |         | 1265               |         | 1290               |         | 1355               |         |

## WPAmini Free Cooling

| CODE                         |        | M.U. | WPA030             |         | WPA045             |         | WPA050             |         | WPA055             |         |
|------------------------------|--------|------|--------------------|---------|--------------------|---------|--------------------|---------|--------------------|---------|
| Cooling capacity             | W15L32 | kW   | 104                |         | 134,1              |         | 165,1              |         | 185,3              |         |
| Absorbed power               | W15L32 | kW   | 25,2               |         | 35,8               |         | 43                 |         | 61,8               |         |
| SEPR                         |        |      | 6,20               |         | 5,79               |         | 5,72               |         | 5,63               |         |
| Cooling capacity             | W7L35  | kW   | 93                 |         | 118                |         | 146                |         | 166                |         |
| Absorbed power               | W7L35  | kW   | 24                 |         | 33                 |         | 40                 |         | 48                 |         |
| Refrigerant Gas              |        |      | R410A              |         | R410A              |         | R410A              |         | R410A              |         |
| Refrigerant Gas charge       |        | kg   | 8 + 8              |         | 10 + 10            |         | 13 + 13            |         | 15 + 15            |         |
| Cooling circuits/Compressors |        | N°   | 2 / 4              |         | 2 / 4              |         | 2 / 4              |         | 2 / 4              |         |
| Rated voltage                |        | V~   | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 |
| Nominal Frequency            |        | Hz   | 50                 | 60      | 50                 | 60      | 50                 | 60      | 50                 | 60      |
| Height x Width x Depth       |        | mm   | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         |
| Shipping weight              |        | kg   | 1515               |         | 1575               |         | 1600               |         | 1665               |         |

## WPAmini Low Noise Free Cooling

| CODE                         |        | M.U. | WPA030             |         | WPA045             |         | WPA050             |         | WPA055             |         |
|------------------------------|--------|------|--------------------|---------|--------------------|---------|--------------------|---------|--------------------|---------|
| Cooling capacity             | W15L32 | kW   | 100,2              |         | 128                |         | 155,7              |         | 170,7              |         |
| Absorbed power               | W15L32 | kW   | 25,7               |         | 37,6               |         | 44,9               |         | 66,2               |         |
| SEPR                         |        |      | 6,19               |         | 5,80               |         | 5,61               |         | 5,32               |         |
| Cooling capacity             | W7L35  | kW   | 89                 |         | 112                |         | 137                |         | 153                |         |
| Absorbed power               | W7L35  | kW   | 24                 |         | 35                 |         | 43                 |         | 52                 |         |
| Refrigerant Gas              |        |      | R410A              |         | R410A              |         | R410A              |         | R410A              |         |
| Refrigerant Gas charge       |        | kg   | 8 + 8              |         | 10 + 10            |         | 13 + 13            |         | 15 + 15            |         |
| Cooling circuits/Compressors |        | N°   | 2 / 4              |         | 2 / 4              |         | 2 / 4              |         | 2 / 4              |         |
| Rated voltage                |        | V~   | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 | 400 , 3            | 460 , 3 |
| Nominal Frequency            |        | Hz   | 50                 | 60      | 50                 | 60      | 50                 | 60      | 50                 | 60      |
| Height x Width x Depth       |        | mm   | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         | 2316 x 1370 x 3650 |         |
| Shipping weight              |        | kg   | 1530               |         | 1590               |         | 1615               |         | 1680               |         |

(1) Evaporator water IN/OUT 12/7 °C; condensing air 35 °C. Unit at full load  
 (2) In accordance with ISO 3744, the contribution of pumps is not considered.  
 Industrial Chiller  
 WPA mini

## WPA Standard

| CODE                         |        | M.U. | WPA060         | WPA070         | WPA080         | WPA090         |
|------------------------------|--------|------|----------------|----------------|----------------|----------------|
| Cooling Capacity             | W15L32 | kW   | 210,3          | 237,3          | 283,5          | 314,2          |
| Absorbed Power               | W15L32 | kW   | 51,8           | 63,2           | 71,5           | 81,8           |
| SEPR                         |        |      | 5,58           | 5,37           | 5,21           | 6,05           |
| Cooling Capacity             | W7L35  | kW   | 174,1          | 199,1          | 222,6          | 245,2          |
| Absorbed Power               | W7L35  | kW   | 52,8           | 62,5           | 73,7           | 83             |
| Refrigerant Gas              |        |      | R410A          | R410A          | R410A          | R410A          |
| Refrigerant Gas charge       |        | kg   | 18             | 17,5           | 17             | 18             |
| Cooling circuits/Compressors |        | N°   | 2 / 4          | 2 / 4          | 2 / 4          | 2 / 4          |
| Rated voltage                |        | V~   | 400 , 3        | 460 , 3        | 400 , 3        | 460 , 3        |
| Nominal Frequency            |        | Hz   | 50             | 60             | 50             | 60             |
| Height x Width x Depth       |        | mm   | 2410x3100x2206 | 2410x3100x2206 | 2410x3100x2206 | 2410x3100x2206 |
| Shipping weight              |        | kg   | 2293           | 2337           | 2395           | 2420           |

| CODE                         |        | M.U. | WPA100         | WPA110         | WPA120         | WPA140         |
|------------------------------|--------|------|----------------|----------------|----------------|----------------|
| Cooling Capacity             | W15L32 | kW   | 343,2          | 416,1          | 460,3          | 499,9          |
| Absorbed Power               | W15L32 | kW   | 91,5           | 99,6           | 113,9          | 128,2          |
| SEPR                         |        |      | 6,31           | 6              | 5,70           | 6,04           |
| Cooling Capacity             | W7L35  | kW   | 266,5          | 318,6          | 353,1          | 385,1          |
| Absorbed Power               | W7L35  | kW   | 91,6           | 100,4          | 114,2          | 127,5          |
| Refrigerant Gas              |        |      | R410A          | R410A          | R410A          | R410A          |
| Refrigerant Gas charge       |        | kg   | 15,5           | 22,5           | 25             | 24,5           |
| Cooling circuits/Compressors |        | N°   | 2 / 4          | 2 / 4          | 2 / 4          | 2 / 4          |
| Rated voltage                |        | V~   | 400 , 3        | 460 , 3        | 400 , 3        | 460 , 3        |
| Nominal Frequency            |        | Hz   | 50             | 60             | 50             | 60             |
| Height x Width x Depth       |        | mm   | 2410x3100x2206 | 2410x4400x2206 | 2410x4400x2206 | 2410x4400x2206 |
| Shipping weight              |        | kg   | 2440           | 3119           | 3173           | 3219           |

| CODE                         |        | M.U. | WPA160         | WPA180         | WPA200         |
|------------------------------|--------|------|----------------|----------------|----------------|
| Cooling Capacity             | W15L32 | kW   | 564,9          | 657,2          | 727,4          |
| Absorbed Power               | W15L32 | kW   | 131,8          | 173,7          | 200,1          |
| SEPR                         |        |      | 6,37           | 6,06           | 6,16           |
| Cooling Capacity             | W7L35  | kW   | 432            | 504            | 559,3          |
| Absorbed Power               | W7L35  | kW   | 131,9          | 173,6          | 199,8          |
| Refrigerant Gas              |        |      | R410A          | R410A          | R410A          |
| Refrigerant Gas charge       |        | kg   | 69             | 80,5           | 89             |
| Cooling circuits/Compressors |        | N°   | 2 / 4          | 2 / 6          | 2 / 6          |
| Rated voltage                |        | V~   | 400 , 3        | 460 , 3        | 400 , 3        |
| Nominal Frequency            |        | Hz   | 50             | 60             | 50             |
| Height x Width x Depth       |        | mm   | 2410x5770x2206 | 2410x5770x2206 | 2410x5770x2206 |
| Shipping weight              |        | kg   | 4158           | 4559           | 4561           |

## WPA Free Cooling

| CODE                         | M.U. | WPA060FC       | WPA070FC       | WPA080FC       | WPA090FC       | WPA100FC       | WPA110FC       |
|------------------------------|------|----------------|----------------|----------------|----------------|----------------|----------------|
| Cooling capacity             | kW   | 191            | 217,2          | 245,4          | 271,8          | 294,1          | 347,7          |
| FC Cooling capacity          | kW   | 131            | 131            | 196,5          | 196,5          | 196,5          | 196,5          |
| Absorbed Power               | kW   | 50,4           | 59,4           | 69,3           | 78,6           | 88,6           | 94,9           |
| Refrigerant Gas              |      | R410A          | R410A          | R410A          | R410A          | R410A          | R410A          |
| Refrigerant Gas charge       | kg   | 18             | 17,5           | 17             | 18             | 15,5           | 22,5           |
| Cooling circuits/Compressors | N°   | 2 / 4          | 2 / 4          | 2 / 4          | 2 / 4          | 2 / 4          | 2 / 4          |
| Rated voltage                | V~   | 400 , 3        | 460 , 3        | 400 , 3        | 460 , 3        | 400 , 3        | 460 , 3        |
| Nominal Frequency            | Hz   | 50             | 60             | 50             | 60             | 50             | 60             |
| Height x Width x Depth       | mm   | 2410x3140x2206 | 2410x3140x2206 | 2410x4400x2206 | 2410x4400x2206 | 2410x4400x2206 | 2410x4400x2206 |
| Shipping weight              | kg   | 3054           | 3089           | 3743           | 3932           | 3953           | 4145           |

## WPA Low Noise

| CODE                         |        | M.U. | WPA060SL       | WPA070SL       | WPA080SL       | WPA090SL       |
|------------------------------|--------|------|----------------|----------------|----------------|----------------|
| Cooling capacity             | W15L32 | kW   | 203,3          | 228,5          | 274,8          | 303            |
| Absorbed Power               | W15L32 | kW   | 54,9           | 67,6           | 75,1           | 86,7           |
| SEPR                         |        |      | 5,22           | 5,17           | 4,88           | 5,58           |
| Cooling capacity             | W7L35  | kW   | 170,5          | 194            | 216,6          | 237,4          |
| Absorbed Power               | W7L35  | kW   | 53,4           | 63,8           | 76,8           | 87,1           |
| Refrigerant Gas              |        |      | R410A          | R410A          | R410A          | R410A          |
| Refrigerant Gas charge       |        | kg   | 18             | 17,5           | 17             | 18             |
| Cooling circuits/Compressors |        | N°   | 2 / 4          | 2 / 4          | 2 / 4          | 2 / 4          |
| Rated voltage                |        | V~   | 400 , 3        | 460 , 3        | 400 , 3        | 460 , 3        |
| Nominal Frequency            |        | Hz   | 50             | 60             | 50             | 60             |
| Height x Width x Depth       |        | mm   | 2410x3100x2206 | 2410x3100x2206 | 2410x3100x2206 | 2410x3100x2206 |
| Shipping weight              |        | kg   | 2293           | 2323           | 2395           | 2420           |

| CODE                         |        | M.U. | WPA100SL       | WPA110SL       | WPA120SL       | WPA140SL       |
|------------------------------|--------|------|----------------|----------------|----------------|----------------|
| Cooling capacity             | W15L32 | kW   | 355,7          | 403,8          | 444,6          | 508,3          |
| Absorbed Power               | W15L32 | kW   | 89             | 104,1          | 119,8          | 127,7          |
| SEPR                         |        |      | 5,82           | 5,82           | 5,44           | 5,86           |
| Cooling capacity             | W7L35  | kW   | 276            | 310,3          | 342,6          | 391,7          |
| Absorbed Power               | W7L35  | kW   | 88,9           | 104,2          | 119,1          | 126,7          |
| Refrigerant Gas              |        |      | R410A          | R410A          | R410A          | R410A          |
| Refrigerant Gas charge       |        | kg   | 15,5           | 22,5           | 25             | 24,5           |
| Cooling circuits/Compressors |        | N°   | 2 / 4          | 2 / 4          | 2 / 4          | 2 / 4          |
| Rated voltage                |        | V~   | 400 , 3        | 460 , 3        | 400 , 3        | 460 , 3        |
| Nominal Frequency            |        | Hz   | 50             | 60             | 50             | 60             |
| Height x Width x Depth       |        | mm   | 2410x4400x2206 | 2410x4400x2206 | 2410x4400x2206 | 2410x5770x2206 |
| Shipping weight              |        | kg   | 3095           | 3119           | 3173           | 3855           |

| CODE                         |        | M.U. | WPA160SL       | WPA180SL       | WPA200SL       |
|------------------------------|--------|------|----------------|----------------|----------------|
| Cooling capacity             | W15L32 | kW   | 546,5          | 660,6          | 731,7          |
| Absorbed Power               | W15L32 | kW   | 137,5          | 174,9          | 201            |
| SEPR                         |        |      | 5,72           | 5,83           | 6,23           |
| Cooling capacity             | W7L35  | kW   | 419,5          | 507,3          | 563,4          |
| Absorbed Power               | W7L35  | kW   | 136,6          | 174,2          | 199,9          |
| Refrigerant Gas              |        |      | R410A          | R410A          | R410A          |
| Refrigerant Gas charge       |        | kg   | 69             | 80,5           | 89             |
| Cooling circuits/Compressors |        | N°   | 2 / 4          | 2 / 6          | 2 / 6          |
| Rated voltage                |        | V~   | 400 , 3        | 460 , 3        | 400 , 3        |
| Nominal Frequency            |        | Hz   | 50             | 60             | 50             |
| Height x Width x Depth       |        | mm   | 2410x5770x2206 | 2410x7100x2206 | 2410x7100x2206 |
| Shipping weight              |        | kg   | 4256           | 5205           | 5211           |

# WSA & WSI ErP - Techno Range

Air Cooled - 280-1860 kW

ErP2021 - R513A (WSA) / R1234ze (WSI) - Screw Compressors

## Ideal for cooling water or process fluids

**WSA** is a range of air-cooled liquid chillers featuring **high efficiency and low environmental impact** with free-cooling technology and cooling capacities **from 280 to 1860 kW**. Designed for 24/7, 365-day-a-year process cooling applications, the new WSA - WSI liquid chillers are characterized by one or two refrigeration circuits with stepless screw compressors (WSA) / inverters (WSI) and use plate or shell and tube evaporators with dry expansion and high heat exchange surface. The WSA/WSI range is characterized by high energy efficiency levels (Class A or B), complying with the limits required by **Directive 2009/125/EC Ecodesign ErP 2021**. Thanks to the special W-shaped configuration of the microchannel heat exchangers and their sizing, it was possible to achieve specific power levels (kW/floor area) at the top of the category.

## Refrigerant Circuit

- Cooling capacity: 280 - 1860 kW
- Refrigerant: R513A (WSA); R1234ze (WSA - WSI)
- One or two redundant and independent refrigeration circuits for maximum reliability
- 1 or 2 screw compressors with stepless modulation (WSA) or integrated inverter (WSI)
- AISI 316 stainless steel brazed plate evaporator: single-circuit units
- Shell and tube evaporator with direct expansion and single pass: dual-circuit units
- Microchannel condensers entirely made of long-lasting aluminum (HA9153A) and installed with V and W geometry
- Copper-aluminum Free Cooling coils + 2 low-pressure-drop modulating two-way valves
- Electronic Expansion Valve (EEV)
- High-efficiency aerodynamic axial fans, diameter Ø 910mm, with speed control via phase cut module (optional EC brushless fans available)
- High and low pressure safety valves on the refrigerant side.

## Hydraulic Circuit

- Hydraulic circuit composed of painted steel pipes coated with insulating material
- Victaulic© fittings for supply and return
- Evaporator antifreeze protection: standard differential pressure switch and antifreeze sensor
- P1 (1.5 bar) or P2 (2.5 bar) centrifugal pumps, with cast iron pump body and impeller, asynchronous or inverter motors

## Electrical Panel

- Designed and built in compliance with EN 60204 standards
- Triple-door metal structure with IP44 protection rating for outdoor installation (IP54 available as an option)
- Automatic switches and contactors
- Standard phase monitor
- Clean contacts: remote ON/OFF; general alarm
- Labeled electrical cables
- SEC.blue electronic controller with 7" color touchscreen display

## LOW GWP Version for Low Environmental Impact

WSA - WSI units are available in two low environmental impact versions ensuring a reduction in global warming potential: HFO refrigerant R1234ze (GWP = 7) classified as A2L, non-toxic, slightly flammable, and zero ozone layer impact (WSA-WSI). Refrigerant R513A (GWP = 572) classified as A1, non-toxic, non-flammable, and zero ozone layer impact (WSA).

## HT Version for High Temperature Water Applications (e.g. plastic)

The HT version's refrigeration circuit is specifically designed to produce chilled water with evaporator outlet temperatures from +15°C to +25°C. The compressor has an enhanced motor, allowing wide operating limits and high suction temperature.

## Free Cooling for energy saving

WSA ErP chillers are available in an integrated Free Cooling version, which allows significant energy savings, especially in applications requiring high cooling fluid temperatures (plastic) and installations in cold or temperate climates.

By utilizing external air to cool the fluid, the Free Cooling system can entirely replace the refrigeration circuit, allowing the compressors to be turned off. The heat exchangers have been specifically sized to achieve a Total Free-Cooling Temperature (TFT) 10°C below the set point temperature. WSA - WSI units can be paired with FCB free cooling modules to maximize free cooling performance, further increasing the total free cooling temperature TFT.

## Low Noise Version

Even in the Low Noise version, ideal for installations near residential areas, our units maintain high performance and significant energy savings, ensuring low noise levels. The compressor housing effectively reduces transmitted noise (-4dBA) thanks to a specific sound-absorbing composite material coating.

## Chiller LT version for Ambient Temperatures Down to -20°C

Thanks to a sophisticated condensation control system based on partialization of the condensation surface and control of EC fan speed, the CHILLER LT version can operate in ambient temperatures as low as -20°C.



WSA - R513A

| CODE                  |    | 090  | 110  | 140  | 160  | 180  | 200  | 220  | 250  | 280  | 300  | 320  | 360  | 380  | 420  | 480  | 560  | 640  | 700  |
|-----------------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cooling capacity (1)  | kW | 192  | 243  | 289  | 358  | 397  | 442  | 501  | 542  | 635  | 691  | 764  | 834  | 952  | 983  | 1113 | 1165 | 1287 | 1451 |
| Total power input (1) | kW | 69   | 82   | 109  | 121  | 140  | 141  | 166  | 180  | 211  | 231  | 236  | 279  | 299  | 326  | 368  | 407  | 443  | 480  |
| EER (1)               |    | 2,77 | 2,96 | 2,66 | 2,97 | 2,84 | 3,13 | 3,02 | 3,01 | 3,00 | 3,00 | 3,23 | 2,99 | 3,18 | 3,01 | 3,02 | 2,87 | 2,91 | 3,03 |
| Cooling capacity (2)  | kW | 281  | 360  | 428  | 529  | 578  | 655  | 753  | 781  | 944  | n.a. | 1094 | 1220 | n.a. | 1413 | 1617 | 1686 | n.a. | n.a. |
| Total power input (2) | kW | 84   | 97   | 130  | 143  | 170  | 169  | 197  | 229  | 250  | n.a. | 285  | 335  | n.a. | 380  | 431  | 503  | n.a. | n.a. |
| EER (2)               |    | 3,35 | 3,71 | 3,29 | 3,70 | 3,40 | 3,88 | 3,82 | 3,41 | 3,78 | n.a. | 3,84 | 3,64 | n.a. | 3,72 | 3,75 | 3,35 | n.a. | n.a. |
| SEPR HT (3)           |    | 5,60 | 5,30 | 5,26 | 5,61 | 5,51 | 5,51 | 5,43 | 5,58 | 5,68 | 5,54 | 5,67 | 5,46 | 5,41 | 5,57 | 5,54 | 5,88 | 5,76 | 5,90 |

| Technical data              |       |      |      |      |      |      |      |      |      |      |      |    |      |      |      |      |       |     |  |  |
|-----------------------------|-------|------|------|------|------|------|------|------|------|------|------|----|------|------|------|------|-------|-----|--|--|
| Refrigerant gas             | R513A |      |      |      |      |      |      |      |      |      |      |    |      |      |      |      |       |     |  |  |
| No. of compressors/circuits | 1/1   |      |      |      | 2/2  |      |      |      |      |      |      |    |      |      |      |      |       |     |  |  |
| No. of axial fans           | 3     | 4    | 4    | 6    | 6    | 8    | 8    | 8    | 10   | 10   | 12   | 12 | 14   | 14   | 16   | 16   | 18    | 20  |  |  |
| Sound power [dB(A)] (4)     | 88,3  | 93,6 | 92,8 | 91,3 | 91,2 | 95,2 | 96,6 | 95,4 | 95,9 | 97,8 | 96,8 | 97 | 98,9 | 97,9 | 98,7 | 99,5 | 100,1 | 102 |  |  |

| Dimensions and weights              |      |      |      |      |      |      |      |      |      |      |      |       |       |       |       |       |       |       |  |
|-------------------------------------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|--|
| Hydraulic connection diameter       | 3"   | 3"   | 4"   | 4"   | 4"   | 5"   | 5"   | 5"   | 5"   | 6"   | 6"   | 6"    | 6"    | 6"    | 8"    | 8"    | 8"    | 8"    |  |
| Width                               | 1140 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280  | 2280  | 2280  | 2280  | 2280  | 2280  | 2280  |  |
| Depth                               | 4330 | 3205 | 3205 | 4330 | 4330 | 5875 | 5875 | 5875 | 6955 | 6955 | 8080 | 8080  | 9582  | 9582  | 10707 | 10707 | 11830 | 13330 |  |
| Height                              | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485  | 2485  | 2485  | 2485  | 2485  | 2485  | 2485  |  |
| Empty weight BASIC version [kg] (5) | 3290 | 3970 | 4140 | 5270 | 5410 | 7200 | 7230 | 7220 | 8390 | 8430 | 9240 | 10100 | 10900 | 11380 | 12120 | 12930 | 13560 | 14390 |  |

(1) Data refer to nominal condition (UNI EN 14511:2018): water temperature inlet/outlet 12/7°C, ambient air temperature +35°C.  
 (2) Data refer to HT high water temperature conditions for IT applications: water temperature inlet/outlet 30/20°C, ambient air temperature +35°C  
 (3) Data declared in accordance with European Regulation (EU) 2016/2281 for high temperature process chillers  
 (4) Sound power level measured according to EN ISO 9614. Data of basic unit without options, full load and referred to the following conditions: evaporator fluid: 100% water, IN/OUT temp. = +12/+7 °C, ambient temp. = +35°C.  
 (5) Unit in standard configuration/execution, without optional accessories

WSF - FREE COOLING - R513A

| CODE                              |    | 090  | 110  | 140  | 160  | 180  | 200  | 220  | 250  | 280  | 300  | 320  | 360  | 380  | 420  | 480  | 560  | 640  | 700  |
|-----------------------------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cooling capacity (1)              | kW | 190  | 239  | 286  | 358  | 399  | 446  | 508  | 548  | 642  | 694  | 761  | 835  | 955  | 992  | 1118 | 1164 | 1288 | 1450 |
| Total power input (1)             | kW | 70   | 84   | 109  | 123  | 145  | 146  | 171  | 185  | 217  | 237  | 242  | 284  | 307  | 334  | 376  | 413  | 450  | 487  |
| EER (1)                           |    | 2,70 | 2,84 | 2,61 | 2,91 | 2,76 | 3,05 | 2,97 | 2,97 | 2,95 | 2,93 | 3,14 | 2,94 | 3,11 | 2,97 | 2,97 | 2,82 | 2,86 | 2,98 |
| Cooling capacity (2)              | kW | 286  | 364  | 432  | 530  | 585  | 657  | 744  | 790  | 965  | n.a. | 1102 | 1209 | n.a. | 1441 | 1649 | 1706 | n.a. | n.a. |
| Total power input (2)             | kW | 85   | 99   | 130  | 145  | 172  | 172  | 199  | 231  | 252  | n.a. | 289  | 339  | n.a. | 386  | 435  | 506  | n.a. | n.a. |
| Temp. 100 % Free Cooling (2) [°C] | °C | 10,2 | 11,0 | 8,8  | 11,1 | 10,0 | 12,1 | 11,3 | 10,0 | 11,0 | n.a. | 11,7 | 10,8 | n.a. | 10,1 | 10,3 | 9,9  | n.a. | n.a. |
| EER (2)                           |    | 3,36 | 3,68 | 3,32 | 3,66 | 3,40 | 3,82 | 3,74 | 3,42 | 3,83 | n.a. | 3,81 | 3,57 | n.a. | 3,73 | 3,79 | 3,37 | n.a. | n.a. |
| SEPR HT (3)                       |    | 6,14 | 5,61 | 5,86 | 6,41 | 6,24 | 6,16 | 6,18 | 6,21 | 6,39 | 6,31 | 6,36 | 6,02 | 6,37 | 6,21 | 6,19 | 6,44 | 6,40 | 6,47 |

| Technical data              |       |      |    |      |      |      |      |      |      |      |    |      |      |      |      |      |       |       |  |  |
|-----------------------------|-------|------|----|------|------|------|------|------|------|------|----|------|------|------|------|------|-------|-------|--|--|
| Refrigerant gas             | R513A |      |    |      |      |      |      |      |      |      |    |      |      |      |      |      |       |       |  |  |
| No. of compressors/circuits | 1/1   |      |    |      | 2/2  |      |      |      |      |      |    |      |      |      |      |      |       |       |  |  |
| No. of axial fans           | 3     | 4    | 4  | 6    | 6    | 8    | 8    | 8    | 10   | 10   | 12 | 12   | 12   | 12   | 12   | 16   | 18    | 20    |  |  |
| Sound power [dB(A)] (4)     | 88,6  | 93,7 | 93 | 91,7 | 91,6 | 95,4 | 96,8 | 95,6 | 96,1 | 97,9 | 97 | 97,2 | 99,1 | 98,1 | 98,9 | 99,7 | 100,3 | 102,2 |  |  |

| Dimensions and weights              |      |      |      |      |      |      |      |      |      |      |      |       |       |       |       |       |       |       |  |
|-------------------------------------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|--|
| Hydraulic connection diameter       | 3"   | 3"   | 4"   | 4"   | 4"   | 5"   | 5"   | 5"   | 5"   | 6"   | 6"   | 6"    | 6"    | 6"    | 8"    | 8"    | 8"    | 8"    |  |
| Width                               | 1140 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280  | 2280  | 2280  | 2280  | 2280  | 2280  | 2280  |  |
| Depth                               | 4330 | 3205 | 3205 | 4330 | 4330 | 5875 | 5875 | 5875 | 6955 | 6955 | 8080 | 8080  | 9582  | 9582  | 10707 | 10707 | 11830 | 13330 |  |
| Height                              | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485  | 2485  | 2485  | 2485  | 2485  | 2485  | 2485  |  |
| Empty weight BASIC version [kg] (5) | 3390 | 4110 | 4270 | 5450 | 5590 | 7450 | 7480 | 7480 | 8640 | 8680 | 9590 | 10440 | 11270 | 11740 | 13010 | 13820 | 14580 | 15560 |  |

(1) Data refer to nominal condition (UNI EN 14511:2018): water temperature inlet/outlet 12/7°C, ambient air temperature +35°C.  
 (2) Data refer to HT high water temperature conditions for IT applications: water temperature inlet/outlet 30/20°C, ambient air temperature +35°C  
 (3) Data declared in accordance with European Regulation (EU) 2016/2281 for high temperature process chillers  
 (4) Sound power level measured according to EN ISO 9614. Data of basic unit without options, full load and referred to the following conditions: evaporator fluid: 100% water, IN/OUT temp. = +12/+7 °C, ambient temp. = +35°C.  
 (5) Unit in standard configuration/execution, without optional accessories

## WSA - R1234ze

| CODE                  |    | 090  | 110  | 140  | 160  | 180  | 220  | 250  | 280  | 300  | 320  | 360  | 380  | 420  | 480  | 560  | 640  | 700  |
|-----------------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cooling capacity (1)  | kW | 178  | 196  | 227  | 257  | 329  | 370  | 433  | 471  | 525  | 571  | 670  | 726  | 772  | 872  | 891  | 985  | 1119 |
| Total power input (1) | kW | 60   | 68   | 76   | 87   | 104  | 122  | 130  | 153  | 165  | 172  | 199  | 210  | 232  | 266  | 293  | 317  | 334  |
| EER (1)               |    | 2,97 | 2,90 | 3,00 | 2,94 | 3,16 | 3,04 | 3,32 | 3,08 | 3,19 | 3,32 | 3,36 | 3,45 | 3,33 | 3,27 | 3,04 | 3,11 | 3,35 |
| Cooling capacity (2)  | kW | 281  | 312  | 358  | 406  | 507  | 568  | 661  | 715  | n.a. | 868  | 1009 | n.a. | 1160 | 1302 | 1342 | 1472 | n.a. |
| Total power input (2) | kW | 73   | 84   | 92   | 104  | 125  | 148  | 156  | 185  | n.a. | 195  | 229  | n.a. | 272  | 315  | 346  | 373  | n.a. |
| EER (2)               |    | 3,85 | 3,71 | 3,89 | 3,90 | 4,06 | 3,84 | 4,24 | 3,86 | n.a. | 4,45 | 4,41 | n.a. | 4,26 | 4,13 | 3,88 | 3,95 | n.a. |
| SEPR HT (3)           |    | 5,10 | 5,26 | 5,43 | 5,06 | 5,46 | 5,19 | 5,52 | 5,57 | 5,51 | 5,55 | 5,53 | 5,56 | 5,51 | 5,52 | 5,61 | 5,51 | 5,54 |

| Technical data              |         |      |      |      |      |      |      |      |      |      |    |      |      |      |      |       |     |  |
|-----------------------------|---------|------|------|------|------|------|------|------|------|------|----|------|------|------|------|-------|-----|--|
| Refrigerant gas             | R1234ze |      |      |      |      |      |      |      |      |      |    |      |      |      |      |       |     |  |
| No. of compressors/circuits | 1/1     |      |      |      |      |      | 2/2  |      |      |      |    |      |      |      |      |       |     |  |
| No. of axial fans           | 3       | 3    | 4    | 4    | 6    | 6    | 8    | 8    | 8    | 10   | 12 | 12   | 12   | 12   | 14   | 16    | 18  |  |
| Sound power [dB(A)] (4)     | 93,5    | 92,3 | 92,8 | 93,7 | 95,1 | 96,6 | 95,4 | 95,8 | 97,7 | 96,8 | 97 | 98,9 | 97,9 | 98,7 | 99,5 | 100,1 | 102 |  |

| Dimensions and weights              |      |      |      |      |      |      |      |      |      |      |       |       |       |       |       |       |       |  |
|-------------------------------------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|--|
| Hydraulic connection diameter       | 3"   | 3"   | 3"   | 4"   | 4"   | 4"   | 5"   | 5"   | 5"   | 5"   | 6"    | 6"    | 6"    | 6"    | 6"    | 8"    | 8"    |  |
| Width                               | 1140 | 1140 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280  | 2280  | 2280  | 2280  | 2280  | 2280  | 2280  |  |
| Depth                               | 4330 | 4330 | 3205 | 3205 | 4330 | 4330 | 5875 | 5875 | 5875 | 6955 | 8080  | 8080  | 8080  | 8080  | 9582  | 10707 | 11830 |  |
| Height                              | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485  | 2485  | 2485  | 2485  | 2485  | 2485  | 2485  |  |
| Empty weight BASIC version [kg] (5) | 3670 | 3690 | 4110 | 4130 | 5950 | 6110 | 7200 | 7300 | 7360 | 8420 | 10020 | 10070 | 10090 | 10230 | 11390 | 12010 | 13560 |  |

- (1) Data refer to nominal condition (UNI EN 14511:2018): water temperature inlet/outlet 12/7°C, ambient air temperature +35°C.  
(2) Data refer to HT high water temperature conditions for IT applications: water temperature inlet/outlet 30/20°C, ambient air temperature +35°C  
(3) Data declared in accordance with European Regulation (EU) 2016/2281 for high temperature process chillers  
(4) Sound power level measured according to EN ISO 9614. Data of basic unit without options, full load and referred to the following conditions: evaporator fluid: 100% water, IN/OUT temp. = +12/+7 °C, ambient temp. = +35°C.  
(5) Unit in standard configuration/execution, without optional accessories

## WSF - FREE COOLING - R1234ze

| CODE                              |    | 090  | 110  | 140  | 160  | 180  | 220  | 250  | 280  | 300  | 320  | 360  | 380  | 420  | 480  | 560  | 640  | 700  |
|-----------------------------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cooling capacity (1)              | kW | 182  | 198  | 229  | 261  | 333  | 375  | 435  | 477  | 530  | 574  | 675  | 732  | 778  | 881  | 898  | 995  | 1128 |
| Total power input (1)             | kW | 62   | 69   | 78   | 90   | 108  | 125  | 136  | 158  | 169  | 179  | 207  | 218  | 239  | 273  | 301  | 326  | 345  |
| EER (1)                           |    | 2,94 | 2,87 | 2,94 | 2,92 | 3,09 | 2,99 | 3,19 | 3,02 | 3,14 | 3,20 | 3,26 | 3,36 | 3,26 | 3,23 | 2,98 | 3,05 | 3,27 |
| Cooling capacity (2)              | kW | 287  | 315  | 363  | 410  | 507  | 576  | 678  | 713  | n.a. | 880  | 1017 | n.a. | 1170 | 1305 | 1361 | 1507 | n.a. |
| Total power input (2)             | kW | 75   | 84   | 94   | 105  | 127  | 149  | 161  | 189  | n.a. | 200  | 238  | n.a. | 276  | 317  | 352  | 380  | n.a. |
| Temp. 100 % Free Cooling (2) [°C] |    | 10,5 | 9,1  | 11,1 | 9,8  | 11,8 | 10,4 | 12,0 | 11,2 | n.a. | 12,5 | 12,9 | n.a. | 10,6 | 7,9  | 11,1 | 11,7 | n.a. |
| EER (2)                           |    | 3,83 | 3,75 | 3,86 | 3,90 | 3,99 | 3,87 | 4,21 | 3,77 | n.a. | 4,40 | 4,27 | n.a. | 4,24 | 4,12 | 3,87 | 3,97 | n.a. |
| SEPR HT (3)                       |    | 5,83 | 5,80 | 6,27 | 5,88 | 6,30 | 5,96 | 6,21 | 6,37 | 6,88 | 6,13 | 6,34 | 6,42 | 6,36 | 6,42 | 6,35 | 6,52 |      |

| Technical data              |         |      |    |      |      |      |      |    |      |    |      |    |      |      |      |       |       |  |
|-----------------------------|---------|------|----|------|------|------|------|----|------|----|------|----|------|------|------|-------|-------|--|
| Refrigerant gas             | R1234ze |      |    |      |      |      |      |    |      |    |      |    |      |      |      |       |       |  |
| No. of compressors/circuits | 1/1     |      |    |      |      |      | 2/2  |    |      |    |      |    |      |      |      |       |       |  |
| No. of axial fans           | 3       | 3    | 4  | 4    | 6    | 6    | 8    | 8  | 8    | 10 | 12   | 12 | 12   | 12   | 14   | 16    | 18    |  |
| Sound power [dB(A)] (4)     | 93,7    | 92,4 | 93 | 93,9 | 95,3 | 96,7 | 95,6 | 96 | 97,8 | 97 | 97,2 | 99 | 98,1 | 98,8 | 99,6 | 100,2 | 102,1 |  |

| Dimensions and weights              |      |      |      |      |      |      |      |      |      |      |       |       |       |       |       |       |       |  |
|-------------------------------------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|--|
| Hydraulic connection diameter       | 3"   | 3"   | 3"   | 4"   | 4"   | 4"   | 5"   | 5"   | 5"   | 5"   | 6"    | 6"    | 6"    | 6"    | 6"    | 8"    | 8"    |  |
| Width                               | 1140 | 1140 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280  | 2280  | 2280  | 2280  | 2280  | 2280  | 2280  |  |
| Depth                               | 4330 | 4330 | 3025 | 3025 | 4330 | 4330 | 5875 | 5875 | 5875 | 6955 | 8080  | 8080  | 8080  | 8080  | 9582  | 10707 | 11830 |  |
| Height                              | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485  | 2485  | 2485  | 2485  | 2485  | 2485  | 2485  |  |
| Empty weight BASIC version [kg] (5) | 3770 | 3790 | 4240 | 4260 | 6130 | 6290 | 7460 | 7550 | 7610 | 8700 | 10370 | 10410 | 10450 | 10600 | 11760 | 12890 | 14580 |  |

- (1) Data refer to nominal condition (UNI EN 14511:2018): water temperature inlet/outlet 12/7°C, ambient air temperature +35°C.  
(2) Data refer to HT high water temperature conditions for IT applications: water temperature inlet/outlet 30/20°C, ambient air temperature +35°C  
(3) Data declared in accordance with European Regulation (EU) 2016/2281 for high temperature process chillers  
(4) Sound power level measured according to EN ISO 9614. Data of basic unit without options, full load and referred to the following conditions: evaporator fluid: 100% water, IN/OUT temp. = +12/+7 °C, ambient temp. = +35°C.  
(5) Unit in standard configuration/execution, without optional accessories

## WSI - R1234ze

| CODE                  |    | 110  | 160  | 180  | 220  | 280  | 300  | 320  | 360  | 420  | 480  | 560  | 640  | 700  |
|-----------------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cooling capacity (1)  | kW | 215  | 268  | 352  | 448  | 509  | 565  | 639  | 704  | 853  | 942  | 1094 | 1205 | 1265 |
| Total power input (1) | kW | 69   | 87   | 112  | 140  | 155  | 177  | 195  | 223  | 264  | 301  | 359  | 380  | 379  |
| EER (1)               |    | 3,11 | 3,07 | 3,15 | 3,19 | 3,29 | 3,19 | 3,27 | 3,15 | 3,23 | 3,14 | 3,05 | 3,17 | 3,34 |
| Cooling capacity (2)  | kW | 337  | 426  | 549  | 684  | 766  | 865  | 945  | 1086 | 1290 | 1416 | 1672 | 1766 | 1862 |
| Total power input (2) | kW | 84   | 105  | 134  | 169  | 171  | 212  | 214  | 266  | 318  | 363  | 438  | 448  | 443  |
| EER (2)               |    | 4,01 | 4,06 | 4,10 | 4,05 | 4,48 | 4,08 | 4,42 | 4,08 | 4,06 | 3,90 | 3,82 | 3,94 | 4,20 |
| SEPR HT (3)           |    | 6,03 | 5,76 | 5,90 | 6,20 | 6,28 | 6,09 | 6,06 | 6,04 | 6,11 | 6,19 | 6,26 | 6,15 | 6,04 |

| Technical data              |         |      |      |      |       |      |       |       |      |      |       |       |       |  |
|-----------------------------|---------|------|------|------|-------|------|-------|-------|------|------|-------|-------|-------|--|
| Refrigerant gas             | R1234ze |      |      |      |       |      |       |       |      |      |       |       |       |  |
| No. of compressors/circuits | 1/1     |      |      |      | 2/2   |      |       |       |      |      |       |       |       |  |
| No. of axial fans           | 3       | 4    | 6    | 6    | 8     | 8    | 10    | 12    | 12   | 14   | 16    | 16    | 18    |  |
| Sound power [dB(A)] (4)     | 95,9    | 96,3 | 98,2 | 98,9 | 100,9 | 99,3 | 101,3 | 101,2 | 99,6 | 99,6 | 101,2 | 103,1 | 103,1 |  |

| Dimensions and weights              |      |      |      |      |      |      |      |      |      |       |       |       |       |  |
|-------------------------------------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|--|
| Hydraulic connection diameter       | 3"   | 4"   | 4"   | 5"   | 5"   | 5"   | 6"   | 6"   | 6"   | 6"    | 8"    | 8"    | 8"    |  |
| Width                               | 1140 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280  | 2280  | 2280  | 2280  |  |
| Depth                               | 4330 | 3205 | 4330 | 4330 | 4330 | 4330 | 6955 | 8080 | 8080 | 9582  | 10707 | 10707 | 11830 |  |
| Height                              | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485  | 2485  | 2485  | 2485  |  |
| Empty weight BASIC version [kg] (5) | 3630 | 3980 | 4800 | 5760 | 7060 | 7000 | 7930 | 8630 | 9740 | 10490 | 11760 | 12450 | 13120 |  |

- (1) Data refer to nominal condition (UNI EN 14511:2018): water temperature inlet/outlet 12/7°C, ambient air temperature +35°C.  
 (2) Data refer to HT high water temperature conditions for IT applications: water temperature inlet/outlet 30/20°C, ambient air temperature +35°C  
 (3) Data declared in accordance with European Regulation (EU) 2016/2281 for high temperature process chillers  
 (4) Sound power level measured according to EN ISO 9614. Data of basic unit without options, full load and referred to the following conditions: evaporator fluid: 100% water, IN/OUT temp. = +12/+7 °C, ambient temp. = +35°C.  
 (5) Unit in standard configuration/execution, without optional accessories

## WSJ - FREE COOLING - R1234ze

| CODE                              |    | 110  | 160  | 180   | 220  | 280   | 300  | 320   | 360   | 420   | 480   | 560   | 640   | 700   |
|-----------------------------------|----|------|------|-------|------|-------|------|-------|-------|-------|-------|-------|-------|-------|
| Cooling capacity (1)              | kW | 212  | 265  | 348   | 442  | 504   | 558  | 633   | 697   | 843   | 931   | 1081  | 1191  | 1250  |
| Total power input (1)             | kW | 71   | 90   | 115   | 145  | 160   | 183  | 200,9 | 229,9 | 271,5 | 309,5 | 368,3 | 389,4 | 388,8 |
| EER (1)                           |    | 2,97 | 2,95 | 3,03  | 3,05 | 3,16  | 3,06 | 3,15  | 3,03  | 3,10  | 3,01  | 2,94  | 3,06  | 3,22  |
| Cooling capacity (2)              | kW | 332  | 419  | 542   | 672  | 758   | 851  | 935   | 1071  | 1269  | 1394  | 1645  | 1740  | 1837  |
| Total power input (2)             | kW | 87   | 109  | 138   | 175  | 177   | 220  | 222   | 275   | 329   | 375   | 451   | 477   | 457   |
| Temp. 100 % Free Cooling (2) [°C] |    | 8,10 | 8,80 | 10,30 | 8,60 | 10,20 | 9,40 | 10,40 | 10,90 | 9,30  | 9,50  | 9,20  | 8,50  | 9,20  |
| EER (2)                           |    | 3,82 | 3,84 | 3,93  | 3,84 | 4,28  | 3,87 | 4,21  | 3,89  | 3,86  | 3,72  | 3,65  | 3,65  | 4,02  |
| SEPR HT (3)                       |    | 6,78 | 6,66 | 6,41  | 6,90 | 6,94  | 6,71 | 6,60  | 6,52  | 6,77  | 6,70  | 6,97  | 6,64  | 6,74  |

| Technical data              |         |      |      |      |       |      |       |       |      |      |       |       |       |  |
|-----------------------------|---------|------|------|------|-------|------|-------|-------|------|------|-------|-------|-------|--|
| Refrigerant gas             | R1234ze |      |      |      |       |      |       |       |      |      |       |       |       |  |
| No. of compressors/circuits | 1/1     |      |      |      | 2/2   |      |       |       |      |      |       |       |       |  |
| No. of axial fans           | 3       | 4    | 6    | 6    | 8     | 8    | 10    | 12    | 12   | 14   | 16    | 16    | 18    |  |
| Sound power [dB(A)] (4)     | 95,9    | 96,3 | 98,2 | 98,9 | 100,9 | 99,3 | 101,3 | 101,2 | 99,6 | 99,6 | 101,2 | 103,1 | 103,1 |  |

| Dimensions and weights              |      |      |      |      |      |      |      |      |       |       |       |       |       |  |
|-------------------------------------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|--|
| Hydraulic connection diameter       | 3"   | 4"   | 4"   | 5"   | 5"   | 5"   | 6"   | 6"   | 6"    | 6"    | 8"    | 8"    | 8"    |  |
| Width                               | 1140 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280 | 2280  | 2280  | 2280  | 2280  | 2280  |  |
| Depth                               | 4330 | 3205 | 4330 | 4330 | 4330 | 4330 | 6955 | 8080 | 8080  | 9582  | 10707 | 10707 | 11830 |  |
| Height                              | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485 | 2485  | 2485  | 2485  | 2485  | 2485  |  |
| Empty weight BASIC version [kg] (5) | 3730 | 4110 | 4980 | 6050 | 7410 | 7350 | 8300 | 9080 | 10230 | 11130 | 12570 | 13300 | 13960 |  |

- (1) Data refer to nominal condition (UNI EN 14511:2018): water temperature inlet/outlet 12/7°C, ambient air temperature +35°C.  
 (2) Data refer to HT high water temperature conditions for IT applications: water temperature inlet/outlet 30/20°C, ambient air temperature +35°C  
 (3) Data declared in accordance with European Regulation (EU) 2016/2281 for high temperature process chillers  
 (4) Sound power level measured according to EN ISO 9614. Data of basic unit without options, full load and referred to the following conditions: evaporator fluid: 100% water, IN/OUT temp. = +12/+7 °C, ambient temp. = +35°C.  
 (5) Unit in standard configuration/execution, without optional accessories

# WSW ErP - Techno Range

**Water cooled - 236-1529 kW**  
**ErP - R513A - Screw Compressors**

## Ideal for cooling water or process fluids

Liquid chillers designed for 24/7, 365 days a year process cooling applications, water-cooled with one or two refrigerant circuits and screw compressors optimized for the use of the eco-friendly refrigerant R513A. They feature dry expansion evaporators and shell and tube condensers with cooling capacities ranging from 236 kW to 1,529 kW. Cosmotec's experience in process cooling has led to the development of this range of industrial chillers capable of meeting the broad operating limits (both environmental and user side) required by new energy-saving technologies. All WSW chillers feature high levels of energy efficiency (Class A or B) and comply with the limits required by Directive 2009/125/EC Ecodesign ErP 2021.

## Refrigeration Circuit

- Cooling capacity: 236 - 1,529 kW
- Refrigerant: R513A; R134a
- One or two redundant and independent refrigeration circuits for maximum reliability
- 1 or 2 screw compressors with stepless unloading slide valve
- Direct expansion shell and tube evaporators and condensers
- High and low pressure safety valves on the refrigerant side

## Electrical Panel

- Design and construction in compliance with EN 60204 standards
- Triple-door metal structure, with IP44 protection rating for outdoor installation (IP54 available as an option)
- Circuit breakers and contactors
- Standard phase monitor
- Clean contacts: remote ON/OFF; general alarm
- Labeled electrical cables
- SEC.blue electronic controller with 7" color touch-screen display

## LOW GWP version for low environmental impact

The WSW units are available in a low environmental impact version, which ensures a reduction in global warming potential with R513A refrigerant (GWP = 572) classified as A1 non-toxic, non-flammable, and with zero impact on the ozone layer.

## Free Cooling with the integration of the WFM module

Thanks to the integration of the main hydronic components (plate water/water heat exchanger, servo-operated valves, and one or more inverter-controlled pumps), the WFM module allows transforming a system consisting of a WSW chiller and a dry cooler into a free cooling system capable of saving energy. These Free Cooling systems offer significant energy savings, especially in applications requiring high cooling fluid temperatures (plastics) and installations in areas with cold or temperate climates.

The WFM module's control software monitors both external and operating temperatures and adjusts the cooling capacity of the remote dry cooler. This ensures optimal control of the WSW unit's condensation temperature and maximum Free Cooling efficiency during mid-seasons, with low operating costs and minimal environmental impact.

## HT version for high-temperature water applications (e.g., plastics)

The HT version's refrigeration circuit is specially designed (upon request) to produce chilled water with evaporator outlet temperatures from +15°C to +25°C. The compressor has an enhanced motor, allowing for broad operating limits and high suction temperature.

## Low Noise version

Even in the Low Noise version, ideal for installations near residential areas, our units maintain high performance and significant energy savings while ensuring low noise levels. The compressor casing effectively reduces transmitted noise (-4dBA) thanks to a specific composite sound-absorbing material lining.



## WSW Standard

| CODE                         | M.U. | WSW080         |        | WSW090         |        | WSW110         |        | WSW125         |        |
|------------------------------|------|----------------|--------|----------------|--------|----------------|--------|----------------|--------|
| Cooling capacity             | kW   | 230            |        | 286            |        | 310            |        | 352            |        |
| Absorbed Power               | kW   | 45             |        | 55             |        | 60             |        | 69             |        |
| SEPR                         |      | 8,1            |        | 8,22           |        | 7,92           |        | 8,02           |        |
| Refrigerant Gas              |      | R134a          |        | R134a          |        | R134a          |        | R134a          |        |
| Refrigerant Gas charge       | kg   | 61             |        | 76             |        | 82             |        | 93             |        |
| Cooling circuits/Compressors | N°   | 1 / 1          |        | 1 / 1          |        | 1 / 1          |        | 1 / 1          |        |
| Rated voltage                | V~   | 400, 3         | 460, 3 | 400, 3         | 460, 3 | 400, 3         | 460, 3 | 400, 3         | 460, 3 |
| Nominal Frequency            | Hz   | 50             | 60     | 50             | 60     | 50             | 60     | 50             | 60     |
| Height x Width x Depth       | mm   | 1880x1340x3010 |        | 1880x1340x3310 |        | 1880x1460x3306 |        | 1905x1340x3790 |        |
| Shipping weight              | kg   | 2625           |        | 2992           |        | 3029           |        | 3166           |        |

| CODE                         | M.U. | WSW140         |        | WSW160         |        | WSW180         |        | WSW220         |        |
|------------------------------|------|----------------|--------|----------------|--------|----------------|--------|----------------|--------|
| Cooling capacity             | kW   | 429            |        | 459            |        | 570            |        | 626            |        |
| Absorbed Power               | kW   | 83             |        | 90             |        | 110            |        | 120            |        |
| SEPR                         |      | 8,01           |        | 8,31           |        | 8,55           |        | 8,16           |        |
| Refrigerant Gas              |      | R134a          |        | R134a          |        | R134a          |        | R134a          |        |
| Refrigerant Gas charge       | kg   | 113            |        | 15 + 15        |        | 75 + 75        |        | 81 + 81        |        |
| Cooling circuits/Compressors | N°   | 1 / 1          |        | 2 / 2          |        | 2 / 2          |        | 2 / 2          |        |
| Rated voltage                | V~   | 400, 3         | 460, 3 | 400, 3         | 460, 3 | 400, 3         | 460, 3 | 400, 3         | 460, 3 |
| Nominal Frequency            | Hz   | 50             | 60     | 50             | 60     | 50             | 60     | 50             | 60     |
| Height x Width x Depth       | mm   | 1905x1340x3790 |        | 1970x1871x4416 |        | 1970x1871x4916 |        | 2100x1871x4558 |        |
| Shipping weight              | kg   | 3640           |        | 3818           |        | 4420           |        | 4735           |        |

| CODE                         | M.U. | WSW250         |        | WSW265         |        | WSW280         |        | WSW320         |        |
|------------------------------|------|----------------|--------|----------------|--------|----------------|--------|----------------|--------|
| Cooling capacity             | kW   | 704,3          |        | 780            |        | 856            |        | 974            |        |
| Absorbed Power               | kW   | 139            |        | 154            |        | 167            |        | 189            |        |
| SEPR                         |      | 8,24           |        | 8,01           |        | 8              |        | 8,11           |        |
| Refrigerant Gas              |      | R134a          |        | R134a          |        | R134a          |        | R134a          |        |
| Refrigerant Gas charge       | kg   | 92 + 92        |        | 103 + 103      |        | 113 + 113      |        | 128 + 128      |        |
| Cooling circuits/Compressors | N°   | 2 / 2          |        | 2 / 2          |        | 2 / 2          |        | 2 / 2          |        |
| Rated voltage                | V~   | 400, 3         | 460, 3 | 400, 3         | 460, 3 | 400, 3         | 460, 3 | 400, 3         | 460, 3 |
| Nominal Frequency            | Hz   | 50             | 60     | 50             | 60     | 50             | 60     | 50             | 60     |
| Height x Width x Depth       | mm   | 1970x1871x4916 |        | 1986x1871x5084 |        | 1986x1871x4745 |        | 1993x1931x4856 |        |
| Shipping weight              | kg   | 5069           |        | 5555           |        | 6073           |        | 6487           |        |

| CODE                         | M.U. | WSW360         |        | WSW420         |        | WSW480         |        | WSW560         |        |
|------------------------------|------|----------------|--------|----------------|--------|----------------|--------|----------------|--------|
| Cooling capacity             | kW   | 1104           |        | 1261           |        | 1376           |        | 1529           |        |
| Absorbed Power               | kW   | 213            |        | 240            |        | 212            |        | 300            |        |
| SEPR                         |      | 8,32           |        | 8,24           |        | 8,14           |        | 8,51           |        |
| Refrigerant Gas              |      | R134a          |        | R134a          |        | R134a          |        | R134a          |        |
| Refrigerant Gas charge       | kg   | 145 + 145      |        | 160 + 160      |        | 180 + 180      |        | 200 + 200      |        |
| Cooling circuits/Compressors | N°   | 2 / 2          |        | 2 / 2          |        | 2 / 2          |        | 2 / 2          |        |
| Rated voltage                | V~   | 400, 3         | 460, 3 | 400, 3         | 460, 3 | 400, 3         | 460, 3 | 400, 3         | 460, 3 |
| Nominal Frequency            | Hz   | 50             | 60     | 50             | 60     | 50             | 60     | 50             | 60     |
| Height x Width x Depth       | mm   | 2026x1891x5278 |        | 2129x1951x4583 |        | 2165x1936x5096 |        | 2165x1931x5390 |        |
| Shipping weight              | kg   | 6736           |        | 7194           |        | 7576           |        | 7800           |        |



# ORA

## Oil Chiller - 2-16 kW R134a - Scroll compressors

### Oil industrial chiller

Oil cooling is indispensable in a variety of applications:

- machine tools: to control the temperature of the hydraulic oil or spindle oil, preventing deformation and resulting in better surface finish and accuracy of the finished product
- chip-removing machines: Cooling of the cutting oil improves the life of the machine tool and allows a better surface finish of the final product.
- in presence of oleodynamic circuits.

Thanks to their configurability and high thermodynamic performance, ORA oil chillers can perfectly meet the requirements of these industrial applications.

### Main features

- Cooling capacity between 2 and 16 kW
- Refrigerant fluid R134a (2÷4kW); R407C (6÷16kW)
- Non-ferrous hydraulic circuit and stainless steel plate evaporator to preserve oil quality
- Microprocessor control programmable with proprietary software
- piston or scroll compressors
- Fully configurable units with numerous options and accessories
- Compact design suitable for installation in small spaces close to the machine tool
- Structure designed for handling by eyebolts
- Axial fans with speed control (optional)
- 10 bar gear pump (optional)
- Zero oil pressure gauge – 25 bar in glycerine

- Automatic hydraulic bypass valve set at 10 bar
- The structure and design ensure complete accessibility to internal components for easy maintenance

### Available Versions

- Direct exchange version with plate evaporator
- Direct exchange version with plate evaporator and gear pump
- ORA Process Chillers do not fall under the applicability of the regulations MT (Medium Temperature – EU 2015/1095) and HT (High Temperature – EU 2016/2281)
- Working range of the chilled fluid: +13°C ÷ +30°C



## ORA20-34-43-58-70

| CODE                          | M.U.  | ORA20                  | ORA34                  | ORA43                  | ORA58                  | ORA70                  |
|-------------------------------|-------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Cooling capacity (1)          | W     | 2100                   | 3400                   | 4300                   | 5800                   | 7000                   |
| Absorbed power (2)            | W     | 600                    | 1200                   | 1300                   | 1500                   | 1900                   |
| Refrigerant Gas               |       | R134a                  | R134a                  | R134a                  | R407C                  | R407C                  |
| Refrigerant Gas charge        | kg    | 0,7                    | 1,1                    | 0,8                    | 2,0                    | 2,2                    |
| Cooling circuits/Compressors  | N°    | 1 / 1                  | 1 / 1                  | 1 / 1                  | 1 / 1                  | 1 / 1                  |
| Power Supply                  | V-Hz  | 400-3-50<br>(460-3-60) | 400-3-50<br>(460-3-60) | 400-3-50<br>(460-3-60) | 400-3-50<br>(460-3-60) | 400-3-50<br>(460-3-60) |
| Auxiliaries feed              | VAC   | 230 (24)               | 230 (24)               | 24                     | 24                     | 24                     |
| Connections                   |       | Morsettiera            |                        |                        |                        |                        |
| Fan Type/N°                   |       | Assiale /1             |                        |                        |                        |                        |
| Condenser fan air flow (free) | m³/h  | 1200                   | 1800                   | 1800                   | 4100                   | 4100                   |
| Total fan absorbed power      | W     | 150                    | 90                     | 90                     | 160                    | 160                    |
| Hydraulic connections         | Ø     | ½"                     | ¾"                     | ¾"                     | ¾"                     | ¾"                     |
| Noise Level (3)               | dB(A) | 44                     | 45                     | 45                     | 48                     | 52                     |
| Height x Width x Depth        | mm    | 720x420x580            | 1146x570x740           | 1146x570x740           | 1146x570x740           | 1146x570x740           |
| Shipping weight               | kg    | 80                     | 100                    | 115                    | 115                    | 52                     |

| OPTIONAL PUMP       | M.U.  | ORA20 | ORA34 | ORA43 | ORA58 | ORA70 |
|---------------------|-------|-------|-------|-------|-------|-------|
| Pump absorbed power | W     | 370   | 370   | 370   | 550   | 550   |
| Nominal flow        | l/min | 8,5   | 16    | 16    | 25    | 25    |
| Available nom. head | bar   | 10    | 10    | 10    | 10    | 10    |

(1) Referred to oil ISO VG 32 at conditions inlet/outlet Temperature 38/30°C, ambient 32°C  
 (2) Referred to the compressor only at the following conditions: oil Temperature inlet/outlet 38/30°C, ambient Temperature 32°C  
 (3) Sound pressure level referred to free field at distance of 10m EN ISO 9614-2

## ORA95-A3-A6

| CODE                          | M.U.  | ORA95                  | ORAA3                  | ORAA6                  |
|-------------------------------|-------|------------------------|------------------------|------------------------|
| Cooling capacity (1)          | W     | 10000                  | 13000                  | 16000                  |
| Absorbed power (2)            | W     | 2600                   | 3200                   | 4100                   |
| Refrigerant Gas               |       | R407C                  | R407C                  | R407C                  |
| Refrigerant Gas charge        | kg    | 3,0                    | 4,5                    | 4,1                    |
| Cooling circuits/Compressors  | N°    | 1 / 1                  | 1 / 1                  | 1 / 1                  |
| Power Supply                  | V-Hz  | 400-3-50<br>(460-3-60) | 400-3-50<br>(460-3-60) | 400-3-50<br>(460-3-60) |
| Auxiliaries feed              | VAC   | 24                     | 24                     | 24                     |
| Connections                   |       | Morsettiera            |                        |                        |
| Fan Type/N°                   |       | Assiale /1             |                        |                        |
| Condenser fan air flow (free) | m³/h  | 9700                   | 9700                   | 9700                   |
| Total fan absorbed power      | W     | 780                    | 780                    | 780                    |
| Hydraulic connections         | Ø     | 1"                     | 1"                     | 1"                     |
| Noise Level (3)               | dB(A) | 58                     | 58                     | 62                     |
| Height x Width x Depth        | mm    | 1500x735x926           | 1500x735x926           | 1500x735x926           |
| Shipping weight               | kg    | 200                    | 220                    | 250                    |

| OPTIONAL PUMP       | M.U.  | ORA95 | ORAA3 | ORAA6 |
|---------------------|-------|-------|-------|-------|
| Pump absorbed power | W     | 750   | 1500  | 1500  |
| Nominal flow        | l/min | 38    | 50    | 50    |
| Available nom. head | bar   | 10    | 10    | 10    |

(1) Referred to oil ISO VG 32 at conditions inlet/outlet Temperature 38/30°C, ambient 32°C  
 (2) Referred to the compressor only at the following conditions: oil Temperature inlet/outlet 38/30°C, ambient Temperature 32°C  
 (3) Sound pressure level referred to free field at distance of 10m EN ISO 9614-2



**cosmotec**  
*your cooling solutions*

STULZ S.p.A.  
Via E.Torricelli 3  
37067 Valeggio sul Mincio (VR)  
Tel. +39 045.6331600  
Fax +39 045.6331635

[www.cosmotec.it](http://www.cosmotec.it)  
[info@cosmotec-cooling.com](mailto:info@cosmotec-cooling.com)